

# **Attachment A**

Redlined Version of Revisions to GO 95

## Table of Contents

|                                                   |    |
|---------------------------------------------------|----|
| Rule 12.1-C .....                                 | 4  |
| Rule 12.2 .....                                   | 5  |
| Rule 12.3 .....                                   | 6  |
| Rule 34-G .....                                   | 7  |
| Rule 43.1-C .....                                 | 8  |
| Rule 43.2-C .....                                 | 9  |
| Rule 44 .....                                     | 10 |
| Rule 44.1 .....                                   | 11 |
| Rule 44.2 .....                                   | 15 |
| Rule 44.3 .....                                   | 16 |
| Rule 45 .....                                     | 17 |
| Rule 46 .....                                     | 18 |
| Rule 47 .....                                     | 19 |
| Rule 48 .....                                     | 21 |
| Rule 48.1 .....                                   | 22 |
| Rule 48.2 .....                                   | 23 |
| Rule 48.3 .....                                   | 25 |
| Rule 48.4 .....                                   | 26 |
| Rule 48.5 .....                                   | 27 |
| Rule 48.6 .....                                   | 28 |
| Rule 48.7 .....                                   | 29 |
| Rule 49.2-C .....                                 | 30 |
| Rule 49.3-C .....                                 | 32 |
| Rule 49.4-B .....                                 | 34 |
| Rule 49.4-Table 8 (Minimum Conductor Sizes) ..... | 35 |
| Rule 49.5 .....                                   | 37 |
| Rule 49.6-B .....                                 | 38 |
| Rule 49.7 .....                                   | 39 |
| Rule 54.5 .....                                   | 40 |
| Rule 56.2 .....                                   | 41 |
| Rule 57.2 .....                                   | 42 |
| Rule 66.2 .....                                   | 43 |

|                 |    |
|-----------------|----|
| Rule 77.3.....  | 44 |
| Rule 81.3.....  | 45 |
| Rule 84.5.....  | 46 |
| Rule 86.2.....  | 47 |
| Rule 87.2.....  | 48 |
| Rule 87.5.....  | 49 |
| Rule 94.3.....  | 50 |
| Appendix B..... | 51 |
| Appendix C..... | 52 |
| Appendix F..... | 53 |

## Rule 12.1-C

### **12.1 Construction and Reconstruction of Lines**

#### **C Subordinate Element**

An element (such as a crossarm or a conductor) added to a pole, tower or structure shall meet all requirements of these rules but does not require any change in like elements already existing except where the added element is related in buck arm construction to an existing arm in which case all construction on the related arms shall meet the requirements of these rules. A crossarm, pole, tower or other structure to which any subordinate element is added shall meet the ~~strength-safety-factor~~ requirements specified in Rule 44.3.

## Rule 12.2

### 12.2 Maintenance of Lines

All lines and portions of lines shall be maintained in such condition as to ~~provide safety factors not less than those~~ meet the requirements specified in Rule 44.3~~1, Rule 44.3, and Rule 403~~. Lines and portions of lines constructed or reconstructed on or after the effective date of this Order shall be kept in conformity with the requirements of this Order.

The restoration of clearance originally established prior to the effective date of this Order, where the original clearance has been reduced by additional sagging or other causes, is not considered to be reconstruction and the reestablished clearance shall conform to the requirements of the rules in effect at the time the original clearance was established. The changing of clearance for any other purpose is reconstruction and clearances so changed shall comply with the rules of this Order applicable to reconstruction.

## Rule 12.3

### **12.3 Lines Constructed Prior to This Order**

The requirements of this Order, other than the ~~safety factor~~ requirements specified in Rule 12.2, do not apply to lines or portions of lines constructed or reconstructed prior to the effective date of this Order. In all other particulars, such lines or portions of lines shall conform to the requirements of the rules in effect at the time of their construction or reconstruction.

Lines or portions of lines constructed or reconstructed before July 1, 1942, may conform to and be maintained in accordance with the requirements of this Order, instead of the requirements in effect at the time of such construction or reconstruction.

## **34 Foreign Attachments**

### **G. Guying**

Where the effects of the mechanical loads imposed on poles or structures exceed ~~safety factors~~ the requirements as specified in Rule 44, or at the request of the granting authority, additional strength shall be provided by the use of guys or other suitable construction. When guying is required, refer to Rules 56 and 86 for applicable requirements.

## Rule 43.1-C

### **C. Temperature**

Conductor or messenger temperature shall be assumed to be 0°F at the time of maximum loading. A conductor or messenger temperature of at least 130°F shall also be assumed for computing sag and its effect on structural loads due to weight span.

Note: Revised February 5, 2014 by Decision No. 14-02-015.

## Rule 43.2-C

### **C. Temperature**

Conductor or messenger temperature shall be assumed to be 25°F at the time of maximum loading. A conductor or messenger temperature of at least 130°F shall also be assumed for computing sag and its effect on structural loads due to weight span.

Note: Revised February 5, 2014 by Decision No. 14-02-015.

## Rule 44

### **44     Safety Load and Strength Factors**

~~The safety factors specified in these rules are the minimum allowable ratios of material and/or line element strengths to the effect of design loads as specified in Rule 43.~~

The effects of the loads in Rule 43, multiplied by the load factors in Table 4-1, shall be less than or equal to the strengths of materials and/or line elements multiplied by the applicable strength factors in Table 4-2.

Note 1: Deformation, deflection, or displacement of the structure or parts of the structure may change the effects of the assumed loads. When calculating load effects that account for deformation, deflection, or displacement of supporting structures and other line elements, calculations should be made using Rule 43 loads prior to application of the load factors. Factored loads may be used to calculate load effects that account for deformation, deflection, or displacement of the structure or parts of the structure, when calculations using factored loads result in load effects larger than load effects calculated using Rule 43 loads prior to application of the load factors.

Note 2: The ratios of the load factors in Table 4-1 to the strength factors in Table 4-2 are analogous to factors of safety (i.e., safety factors). These factors are applied to account for variabilities (e.g., deterioration, material properties, environmental loads, additional attachments, construction details and workmanship). See Table F-1 in Appendix F for a summary of comparable factors of safety for various line components.

Note:     Revised March 30, 1968 by Decision No. 73813, February 13, 1974 by Decision No. 82466 and February 5, 2014 by Decision No. 14-02-015.

## Rule 44.1

### 44.1 Installation and Reconstruction

~~Lines and elements of lines, upon installation or reconstruction, shall provide as a minimum the safety factors specified in Table 4. The load and strength factors in Table 4-1 and Table 4-2 shall be used when designing lines and elements of lines for installation or reconstruction.~~

The design shall consider the structural loading and mechanical strength requirements of all supply and communication facilities planned to occupy the structure. For purposes of this rule, the term “planned” applies to the facilities intended to occupy the structure that are actually known to the constructing company at the time of design.

The entity responsible for performing the loading calculation(s) for an installation or reconstruction shall maintain records of these calculations for the service life of the pole or other structure for which a loading calculation was made and shall provide such information to authorized joint use occupants and the Commission upon request.

Note: Revised January 12, 2012 by Decision No. 1201032 and February 5, 2014 by Decision No. 14-02-015.

**Table 4: Minimum Safety Factors**

| Line Element                                                        | Grades of Construction |           |           |
|---------------------------------------------------------------------|------------------------|-----------|-----------|
|                                                                     | Grade "A"              | Grade "B" | Grade "C" |
| Conductors, splices and conductor fastenings (other than tie wires) | 2                      | 2         | 2         |
| Pins                                                                | 2                      | 2         | 2         |
| Pole line hardware                                                  | 2                      | 2         | 2         |
| Line Insulators (mechanical)                                        | 3                      | 2         | 2         |
| Guy insulators (mechanical)                                         |                        |           |           |
| Interlocking                                                        | 2                      | 2         | 2         |
| Noninterlocking glass fiber                                         | 3                      | 2 (a)     | 2 (b)     |
| Guys                                                                | 2                      | 2         | 2         |
| Messengers and span wires                                           | 2                      | 2         | 2         |
| Foundations against uplift                                          | 1.5                    | 1.5       | 1.5       |
| Foundations against depression                                      | 3                      | 2         | 2         |
| Poles Towers and Structures                                         |                        |           |           |
| Wood                                                                | 4                      | 3         | 2         |
| Metal (including elements of foundations)                           | 1.5 (c)                | 1.25 (c)  | 1.25 (c)  |
| Reinforced concrete                                                 | 4                      | 3         | 3         |
| Prestressed or post-tensioned concrete                              | 1.8                    | 1.5       | 1.5       |
| Other engineered materials                                          | 1.5                    | 1.25      | 1.25      |
| Crossarms                                                           |                        |           |           |
| Wood                                                                | 2                      | 2         | 2         |
| Metal                                                               | 1.5(c)                 | 1.25(c)   | 1.25(c)   |
| Prestressed Concrete                                                | 1.8                    | 1.5       | 1.5       |
| Other engineered materials                                          | 1.5                    | 1.25      | 1.25      |

**Table 4-1: Minimum Load Factors**

| <b>Load Condition</b>     | <b>Load Factors</b> |                  |                  |
|---------------------------|---------------------|------------------|------------------|
|                           | <b>"Grade A"</b>    | <b>"Grade B"</b> | <b>"Grade C"</b> |
| <u>Vertical Loads</u>     | <u>1.500</u>        | <u>1.250</u>     | <u>1.250</u>     |
| <u>Wind Loads</u>         | <u>1.500</u>        | <u>1.250</u>     | <u>1.250</u>     |
| <u>Wire Tension Loads</u> | <u>1.500</u>        | <u>1.250</u>     | <u>1.250</u>     |

**Table 4-2: Maximum Strength Factors**

| <b>Line Element</b>                                                        | <b>Strength Factors</b> |                  |                  |
|----------------------------------------------------------------------------|-------------------------|------------------|------------------|
|                                                                            | <b>"Grade A"</b>        | <b>"Grade B"</b> | <b>"Grade C"</b> |
| <u>Conductors, splices and conductor fastenings (other than tie wires)</u> | <u>0.750</u>            | <u>0.625</u>     | <u>0.625</u>     |
| <u>Pins</u>                                                                | <u>0.750</u>            | <u>0.625</u>     | <u>0.625</u>     |
| <u>Pole line hardware</u>                                                  | <u>0.750</u>            | <u>0.625</u>     | <u>0.625</u>     |
| <u>Line Insulators (mechanical)</u>                                        | <u>0.500</u>            | <u>0.625</u>     | <u>0.625</u>     |
| <b><u>Guy insulators (mechanical)</u></b>                                  |                         |                  |                  |
| <u>Interlocking</u>                                                        | <u>0.750</u>            | <u>0.625</u>     | <u>0.625</u>     |
| <u>Noninterlocking glass fiber</u>                                         | <u>0.500</u>            | <u>0.625(a)</u>  | <u>0.625(b)</u>  |
| <u>Guys</u>                                                                | <u>0.750</u>            | <u>0.625</u>     | <u>0.625</u>     |
| <u>Messengers and span wires</u>                                           | <u>0.750</u>            | <u>0.625</u>     | <u>0.625</u>     |
| <u>Foundations against uplift</u>                                          | <u>1.000</u>            | <u>0.833</u>     | <u>0.833</u>     |
| <u>Foundations against depression</u>                                      | <u>0.500</u>            | <u>0.625</u>     | <u>0.625</u>     |
| <b><u>Poles, Towers and Structures</u></b>                                 |                         |                  |                  |
| <u>Wood</u>                                                                | <u>0.375</u>            | <u>0.415</u>     | <u>0.625</u>     |
| <u>Metal (including elements of foundations)</u>                           | <u>1.000(c)</u>         | <u>1.000(c)</u>  | <u>1.000(c)</u>  |
| <u>Reinforced concrete</u>                                                 | <u>0.375</u>            | <u>0.415</u>     | <u>0.415</u>     |
| <u>Prestressed or post-tensioned concrete</u>                              | <u>0.830</u>            | <u>0.830</u>     | <u>0.830</u>     |
| <u>Other engineered materials</u>                                          | <u>1.000</u>            | <u>1.000</u>     | <u>1.000</u>     |
| <b><u>Crossarms</u></b>                                                    |                         |                  |                  |
| <u>Wood</u>                                                                | <u>0.750</u>            | <u>0.625</u>     | <u>0.625</u>     |
| <u>Metal</u>                                                               | <u>1.000(c)</u>         | <u>1.000(c)</u>  | <u>1.000(c)</u>  |
| <u>Prestressed Concrete</u>                                                | <u>0.830</u>            | <u>0.830</u>     | <u>0.830</u>     |
| <u>Other engineered materials</u>                                          | <u>1.000</u>            | <u>1.000</u>     | <u>1.000</u>     |

- (a) Insulators are to be replaced before their mechanical strengths safety factors have been reduced (due to deterioration or changes in construction, arrangement, or other conditions subsequent to installation) to less than 95 percent of the strength required at installation. safety factor specified in Rule 44.1.

- (b) Insulators are to be replaced before ~~their mechanical strengths safety factors~~ have been reduced (due to deterioration or changes in construction, arrangement, or other conditions subsequent to installation) to less than 75 percent of the ~~strength required at installation. safety factor specified in Rule 44.1.~~
- (c) For aluminum members subject to tension caused by one or more estimated loads and where the critical load combination for the tension member would not endanger adjacent compression members, ~~the strength~~ factor ~~of safety~~ on ultimate tension shall be ~~.75-2~~ for Grades "A", ~~"B" and "C"~~ construction. ~~and 1.67 for Grades "B" and "C" construction.~~

## Rule 44.2

### 44.2 Additional Construction

Any entity planning the addition of facilities shall ensure that, following the addition, of the facilities supporting structures, including their members and connections, ~~will not reduce the safety factors below the values~~ meet the strength requirements specified by Rule 44.3.

If performed, the entity responsible for performing loading calculations for additional construction shall maintain these loading calculations for the service life of the pole or other structure for which a loading calculation was made and shall provide such information to authorized joint use occupants and the Commission upon request.

Any loading calculations performed for wood structures more than 15 years old shall incorporate the results of intrusive inspections performed within the previous five years.

Note: Added August 20, 2009 by Decision No. 09-08-029. Revised January 12, 2012 by Decision No. 1201032, and February 5, 2014 by Decision No. 14-02-015.

## Rule 44.3

### 44.3 Replacement

Lines or parts thereof shall be replaced or reinforced before their ability to withstand the loads specified in Rule 43 is safety factors have been reduced (due to changes factors such as the addition of facilities and/or deterioration and/or installation of additional facilities) to less than two-thirds of that required at installation by Rule 44 for in Grades "A" and "B" construction, and to less than two thirds of the safety factors specified in Rule 44.1 and in to less than one-half of that required for Grade "C" construction to less than one half of the safety factors specified in Rule 44.1.

Poles in Grade "C" construction that only support communication lines shall also conform to the requirements of Rule 81.3-A.

In no case shall the application of this rule be held to permit the use of structures or any member of any structure with a safety factor less than one. lines or parts thereof with strengths less than the effects of the loads specified in Rule 43.

Note: Allowed reductions specified in this rule are modified by Table 4-2 Footnotes.

Note: Revised January 13, 2005 by Decision No. 0501030, January 12, 2012 by Decision No. 1201032, and February 5, 2014 by Decision No. 14-02-015.

## Rule 45

### 45 Transverse Strength Requirements

In computing the transverse strength requirements of Lines (See Rule 22.1) under the conditions specified in Rule 43, safety load and strength factors ~~at least equal to those meeting the requirements~~ of Rule 44 shall be used. In heavy loading areas, for supporting structures carrying more than 10 wires (not including cables and supporting messengers) where the pin spacing does not exceed 15 inches, the transverse wind load shall be calculated on two-thirds of the total number of such wires with a minimum of ten. Where there is a change in direction of conductors and messengers, an additional transverse load shall be the resultant of all tensions under the assumed loading conditions.

Note: Revised February 5, 2014 by Decision No. 14-02-015.

#### 45.1 Special Provisions

Where it is impossible to obtain the required transverse strength except by the use of side guys or special structures and it is physically impossible to install them at the location of the transversely weak support, the strength may be supplied by side guying the support at each side of, and as near as practicable to, such weak support with a distance not in excess of 800 feet between the supports so guyed; provided that the section of line between the transversely strong structures is weak in regard to transverse loads only, that is in a straight line and that the strength of the side guyed supports is calculated on the transverse loading of the entire section of line between them.

Note: Revised February 5, 2014 by Decision No. 14-02-015.

## Rule 46

### **46 Vertical Strength Requirements**

In computing vertical strength requirements, the loads upon Lines (See Rule 22.1) shall be their own weight plus the vertical loads which they support under the conditions of Rule 43, together with the effect of any difference in elevation of supports.

On structures with crossarms or guard arms, the vertical loads on the structure shall include a load of 300 lbs. at one end of one of the arms.

~~Safety~~ Load and strength factors shall apply as specified in Rule 44.

Note: Revised February 5, 2014 by Decision No. 14-02-015.

## Rule 47

### 47 Longitudinal Strength Requirements

In computing the longitudinal strength requirements of Lines (See Rule 22.1), the longitudinal load shall be considered as that due to the maximum working tension under the conditions specified in Rule 43.

Safety Load and strength factors shall apply as specified in Rule 44.

Note: Revised February 5, 2014 by Decision No. 14-02-015.

#### 47.1 Use of Guys and Braces

The longitudinal strength requirements for poles, towers and other supporting structures shall be met either by the structure alone or with the aid of guys and/or braces. Deflection shall be limited by guys and/or braces where such structures alone, although providing the and safety load and strength factors required would deflect sufficiently under the prescribed loadings to reduce clearances below the required values.

Note: Revised February 5, 2014 by Decision No. 14-02-015.

#### 47.2 Change in Grade of Construction

Where sections of higher grade construction are located in lines of lower grade construction the longitudinal load on each end support of such sections at the level involved shall be taken as an unbalanced load in the direction of the higher grade section equal to the total pull of all conductors in that direction. For spans not exceeding 500 feet in length, where the pull in the direction of the higher grade section exceeds 30,000 lbs., the loading requirements may be modified to consider 30,000 lbs. plus one-fourth the excess above 30,000 lbs., to a maximum of 50,000 lbs. ~~The construction of the end supports (including poles, structures, towers, crossarms, pins, insulators, conductor fastenings and guys) of such sections shall be such as to withstand at all times the load specified with a safety factor at least equal to unity. In no case shall the application of this rule be held to permit the design of the end supports (including poles, structures, towers, crossarms, pins, insulators, conductor fastenings and guys) with strengths less than the effects of the loads.~~

In lieu of meeting the requirements of this rule on single poles or structures at ends of higher grade sections, the longitudinal load may be distributed over two poles or structures provided that the two poles or structures are suitably side guyed or are in a straight line with the direction of the longitudinal load of the higher grade section and that the two poles or structures comply with the requirements for the higher grade as to transverse strength and conductors between the two poles comply with the requirements for the higher grade.

### 47.3 End Supports in Grades "A" or "B" Construction

In Grades "A" or "B" construction the longitudinal load on each end support of crossings, conflicts or joint use, where located in lines of the same grade of construction, shall be taken as the unbalanced load equal to the tension of one-third of the total number of conductors (not including overhead ground wires), such one-third of the conductors being so selected as to produce the maximum stress in the supports. If the application of the above results in the fractional part of a conductor, the nearest whole number of conductors shall be used. ~~The construction of the supports (including poles, structures, towers, crossarms, pins, insulators, conductor fastenings and guys) shall be such as to withstand at all times the load specified with a safety factor at least equal to unity. In no case shall the application of this rule be held to permit the design of the end supports (including poles, structures, towers, crossarms, pins, insulators, conductor fastenings and guys) with strengths less than the effects of the loads.~~

Excluded from the requirements of this rule, where Grade "B" construction is required, are Class L lines crossing minor railways and conductor fastenings of Class C circuits crossing major railways.

Note: Revised February 5, 2014 by Decision No. 14-02-015.

## Rule 48

### **48     Strength of Materials**

~~Structural members and their connection shall be designed and constructed so that the structures and parts thereof will not fail or be seriously distorted at any load less than their maximum working loads (developed under the current construction arrangements with loadings as specified in Rule 43) multiplied by the safety factors in Rule 44.~~

~~Values used for the strength of material shall comply with the safety factors specified in Rule 44.~~

Structures, including their members and connections, shall be designed and constructed so that the structures and parts thereof will not fail or be seriously distorted under the requirements of Rule 44.

## Rule 48.1

### 48.1 Wood

#### A. Natural Wood (Non Laminate)

##### (1) Poles

The ~~required~~ strength for natural wood poles of various species meeting the requirements of ANSI O5.1 2008 shall be ~~derived in conjunction with the safety factors in Rule 44 and~~ the designated fiber strength specified in ANSI ~~0~~5.1 2008. Table 5 lists some of the values of designated fiber strength specified in ANSI ~~0~~5.1 2008.

##### (2) Sawn Wood Structural Members

The ~~required~~ strength for sawn wood structural members, such as crossarms and braces, meeting the requirements of ANSI O5.3 2008 shall ~~be derived in conjunction with the safety factors in Rule 44 and~~ the designated fiber strength specified in ANSI O5.3 2008.

Multiply the given ~~allowable stress~~ designated fiber strength values by an additional factor values by of 0.55 for sawn wood where the loading being considered is a long-time loading (i.e., continuous load for one year or more).

#### B. Laminated Wood

The ~~required~~ strength for laminated wood poles and other structural members, such as crossarms, meeting the requirements of ANSI O5.2 2006 shall be ~~derived in conjunction with the safety factors in Rule 44 and~~ the designated fiber strength specified in ANSI O5.2 2006.

Table 5: Sample Wood Strengths  
Specified in ANSI O5.1-2008

| Species                  | Designated Fiber Strength |
|--------------------------|---------------------------|
| Cedar, western red       | 6,000 lbs per square inch |
| Douglas fir              | 8,000 lbs per square inch |
| Fir, white or red, local | 6,600 lbs per square inch |
| Pine, southern           | 8,000 lbs per square inch |

Note: Revised April 26, 1965 by Decision No. 68835; March 9, 1988 by Resolution E-3076, October 9, 1996 by Resolution SU-40 and February 5, 2014 by Decision No. 14-02-015.

## Rule 48.2

### 48.2 Steel

~~The required strength of steel structures and components shall be designed using ASCE 10-97 for latticed steel structures and ASCE 48-11 for tubular steel pole structures, as applicable.~~

As applicable, steel members and their connections shall be designed in accordance with the following standards:

Latticed Steel Structures: ASCE 10-97, and

Tubular Steel Pole Structures: ASCE 48-11

Allowable stresses for steel members and their connections shall be derived ~~in conjunction with the safety factors in Rule 44 and the permitted stresses specified in the applicable standard, by multiplying the values specified in the applicable standard by the appropriate strength factors specified in Table 4-2.~~

Steel members not covered by either of these standards shall be designed using allowable stresses as defined below, consistent with Rule 48:

Tension: The maximum allowable tensile stress shall be calculated using the following formula:

$$F_t = \frac{1}{SF} SF (F_y)$$

Compression: The maximum allowable compressive stress shall be calculated using the following formula:

$$F_a = \frac{1}{SF} SF \left[ F_y - \left( \frac{F_y - 12,000}{200} \right) \frac{l}{r} \right]$$

Shear: The maximum allowable shear stress shall be calculated using the following formula:

$$F_v = \frac{1}{SF} SF 0.66 (F_{ut})$$

Bending: The maximum allowable bending stress for a compact section shall be calculated using the following equation:

$$F_b = \frac{1}{SF} SF (F_y)$$

The maximum allowable bending stress for a non-compact section shall be determined according to the provisions of Chapter E of the AISC Manual of Steel Construction, Allowable Stress Design, 9th Edition.

Combined Stresses: The strength of members subjected to combined stresses shall be determined according to the provisions of Chapter H of the AISC Manual of Steel Construction, Allowable Stress Design, 9th Edition.

Where,

$F_a$  = maximum allowable axial stress, psi

$F_b$  = maximum allowable bending stress, psi

$F_t$  = maximum allowable tensile stress, psi

$F_v$  = maximum allowable shear stress, psi

$F_y$  = specified minimum yield stress, psi

$F_u$  = specified minimum tensile stress, psi

SF = safety strength factor specified in Rule 44

$l$  = unsupported length of member, inches

$r$  = radius of gyration of member, inches

The values used for yield stress,  $F_y$ , and tensile stress,  $F_u$ , shall be the specified minimum values as listed in the appropriate ASTM specification. If the material specification for the steel is unknown and cannot be determined, the values for its yield stress and tensile stress shall be assumed to be 33,000 psi and 60,000 psi, respectively. The modulus of elasticity,  $E$ , is defined to be 29,000 ksi.

Note: Revised March 30, 1968 by Decision No. 73813, January 13, 2005 by Decision No. 0501030, and February 5, 2014 by Decision No. 14-02-015.

## Rule 48.3

### 48.3 Concrete

#### A. Reinforced Concrete

Values used for ultimate strengths of reinforced concrete, ~~in conjunction with safety strength factors given in Rule 44,~~ shall not exceed the following:

Reinforcing steel, tensile or compressive strength, pounds per square inch: 55,000

| Concrete, 1:2:4 mixture | Age      | Compressive Strength  |
|-------------------------|----------|-----------------------|
|                         | 7 days   | 900 lbs per sq. in.   |
|                         | 30 days  | 2,400 lbs per sq. in. |
|                         | 90 days  | 3,100 lbs per sq. in. |
|                         | 6 months | 4,400 lbs per sq. in. |

If reinforced concrete is designed for higher strength values which are proven by test, such values may be used in lieu of the figures given.

#### B. Prestressed Concrete

The minimum strength of the materials used in prestressed concrete structures ~~used in conjunction with the safety factors given in Table 4~~ shall be as follows:

Reinforcing Steel - yield strength ( $F_y$ ) 40,000 psi  
Prestressing Steel - yield strength ( $F_y$ ) 188,000 psi  
Concrete - compressive strength ( $F'_c$ ) at 28 days 4,000 psi

Other strength values may be used provided the strength values used for design are proven by tests.

Note: Rule 48.3-B added on February 13, 1974 by Decision No. 82466.

## Rule 48.4

### 48.4 Fiber-Reinforced Polymer

The ~~required~~ strength of overhead line structures and subcomponents made with fiber-reinforced polymer shall be ~~derived in conjunction with the safety factors in Rule 44 and other permitted stresses specified in the applicable standard. the lower 5th percentile strengths determined in accordance with ASCE 111-2006.~~ This requirement applies to tension and bending, compression and bending, and shear.

The compressive strength shall be determined by a suitable formula for the material or structure, considering the strength of the material, modulus of elasticity, geometry, slenderness ratio and eccentricity of connection.

~~Note: The strength may be determined per Section 2.6.2 of ASCE 111-2006.~~

Note: Added February 5, 2014 by Decision No. 14-02-015.

## Rule 48.5

### 48.5 Other Engineered Materials

The ~~required~~ strength of overhead line structures and subcomponents made with other engineered materials shall be ~~derived in conjunction with the safety factors in Rule 44 and other permitted stresses specified in the applicable standard.~~ the lower 5th percentile strengths determined in accordance with ASCE 111-2006. This requirement applies to tension, compression and shear.

Tension: If the material has a published yield strength value, that value shall be used in lieu of the tensile strength value.

Compression: The compressive strength shall be determined by suitable formula for the material used and member geometry, considering yield and /or tensile strength of the material, modulus of elasticity, slenderness ratio and eccentricity of connection. In no case shall the compressive stress be greater than the yield strength of the material.

~~Note: The strength may be determined per Section 2.6.2 of ASCE 111-2006.~~

Note: Added February 5, 2014 by Decision No. 14-02-015.

## Rule 48.6

### 48.6 Conductors, Span Wires, Guys and Messengers

Values used for ultimate strengths of wires and cable shall not exceed those given in Appendix B. The ultimate strengths given in Table 17 to 24 of Appendix B, except for medium–hard drawn copper, are based on the minimum ultimate strengths given in the standard specifications of ~~the American Society for Testing Material~~ ASTM International.

The ultimate strengths given in Appendix B for medium–hard drawn copper are based on the referenced ASTM standard specifications ~~of the ASTM~~ and provide an allowance above the minimum values of one–quarter of the range difference between minimum and maximum values.

For use of types of wires and cables of other material not included in Appendix B, values for ultimate strengths similarly derived from ASTM standard specifications ~~of the ASTM~~ shall be used except that, if such specifications are nonexistent, ~~maker's~~ manufacturer's specifications may be used provided that tests have been made which shall justify the ~~maker's~~ manufacturer's specifications rating for ultimate strength.

## Rule 48.7

### **48.7 Tower or Pole Foundations and Footings**

The resistance of soil to foundation or footing bearing and uplift shall be calculated from the best available data or determined by test(s).

Foundations ~~or~~ and footings ~~resistance~~ shall be designed consistent with Rule 48 ~~with safety factors applied as specified in Rule 44.~~

## Rule 49.2-C

### C. Strength

Crossarms shall be securely supported by bracing, where necessary, to withstand unbalanced vertical loads and to prevent tipping of any arm sufficiently to decrease clearances below the values specified in Section III. Such bracing shall be securely attached to poles and crossarms. Supports in lieu of crossarms shall have means of resisting rotation in a vertical plane about their attachment to poles or shall be supported by braces as required for crossarms. Metal braces or attachments shall meet the requirements of Rules 48.2 and 49.8.

In addition to the above, a vertical load of 300 lbs. at the outer pin position shall be included in computing the vertical loads on all crossarms.

Note: Revised February 5, 2014 by Decision No. 14-02-015.

#### (1) Longitudinal Loads Normally Balanced:

- (a) **Supply Lines:** Where longitudinal loads are normally balanced, crossarms supporting supply conductors shall be designed to withstand a load, applied in the direction of the conductors at the outer pin position, of 700 pounds. ~~with a safety factor of not less than unity. In no case shall the application of this rule be held to permit the design of crossarms with strengths less than the effects of the loads.~~
- (b) **Communication Lines, Class C:** Where longitudinal loads are normally balanced, crossarms supporting Class C conductors shall have sufficient strength to withstand a load, applied in the direction of the conductors at the outer pin position, of 400 pounds. ~~with a safety factor of not less than unity. In no case shall the application of this rule be held to permit the design of crossarms with strengths less than the effects of the loads.~~

#### (2) Longitudinal Loads Normally Unbalanced: Crossarms subjected to unbalanced longitudinal loads shall ~~have sufficient strength to~~ meet the ~~strengthload and strength factors~~ requirements ~~with safety factors at least equal to those specified~~ in Rule 44.

At unbalanced corners and dead ends in Grades "A", "B" or "C" construction, where conductor tension is held by cantilever strength of pin-type insulators and pins, double crossarms shall be used to permit conductor fastenings at two insulators to prevent slipping. In lieu of double crossarms and double insulators, single crossarms may be used with single insulators and steel pins and prefabricated conductor ties.

For conductor tensions up to 2,000 pounds per conductor, double wood crossarms fitted

with spacing devices at each end will be considered as meeting the strength requirements of Rules 47.2 and 47.3.

Note: Revised March 9, 1988 by Resolution E-3076, and February 5, 2014 by Decision No. 14-02-015.

## Rule 49.3-C

### C. Strength

Insulator pins and conductor fastenings shall be able to withstand the loads to which they may be subjected with ~~safety factors at least equal to those~~ the load and strength factors specified in Rule 44 applied.

Note: A 1-1/2 inch by 9 inch locust pin will usually provide cantilever strength up to 1,000 pounds tension in the conductor with the conductor 3-1/2 inches above the crossarm and a load factor of unity.

#### (1) Longitudinal Loads Normally Balanced:

- (a) **Insulator Pins:** Where longitudinal loads are normally balanced, insulator pins which support conductors shall have sufficient strength to withstand ~~, with a safety factor of not less than unity,~~ a load at the conductor position as follows:

Pins supporting supply conductors 700 pounds

Pins supporting Class C conductors 400 pounds

In no case shall the application of this rule be held to permit the design of insulator pins and conductor fastenings with strengths less than the effects of the loads.

- (b) **Conductor Fastenings:** Where longitudinal loads are normally balanced, tie wires or other conductor fastenings shall be installed in such a manner that they will securely hold the line conductor to the supporting insulators and will withstand without slipping of the conductor unbalanced pulls as follows:

|                            |                                                                   |
|----------------------------|-------------------------------------------------------------------|
| Supply conductor fastening | 40% of the maximum working tensions but not more than 500 pounds. |
|----------------------------|-------------------------------------------------------------------|

|                              |                                                                   |
|------------------------------|-------------------------------------------------------------------|
| Class C conductor fastenings | 15% of the maximum working tensions but not more than 300 pounds. |
|------------------------------|-------------------------------------------------------------------|

~~Tie wires are required on Class C conductors at point-type transpositions not in Grade F construction.~~

- (2) **Longitudinal Loads Normally Unbalanced:** At unbalanced corners and dead ends in Grades "A", "B" or "C" construction, where conductor tension is held by cantilever strength of pin-type insulators and pins, double insulators and wood pins or single

insulators and steel pins shall be used. Each line conductor shall be tied or fastened to both insulators, or the single insulator, to prevent slipping of the conductor under maximum working tension with a ~~safety-load~~ factor of 2 for the temperature and loading conditions specified in Rule 43.

At changes in grade of construction and at end supports in Grades "A" or "B" construction where the conductors are not dead-ended and are supported on pin-type insulators, double insulators and pins with tie wires, or equivalent fastenings, will be considered as meeting the strength requirements of Rules 47.2 and 47.3 for conductor tensions up to 2,000 pounds per conductor.

Note: Revised March 9, 1988 by Resolution E-3076, and February 5, 2014 by Decision No. 14-02-015.

## Rule 49.4-B

### **B. Size**

The minimum sizes of conductors which shall be used in spans of 150 feet or less under the several classes of construction and loadings in both urban and rural districts are specified in Table 8. Larger conductors than those specified in the table will often be necessary to maintain reasonable sag and at the same time ~~provide the required safety to meet the load and strength~~ factors requirements of Rule 44, ground clearances of Table 1, and wire clearances of Table 2.

Conductors of the sizes specified in Table 8 may be used in spans longer than 150 feet, except when specifically prevented by Rule 49.4–C, provided the sags and conductor positions are so adjusted that the allowable working tensions and clearances of this Order are not violated.

The common neutral conductor in common neutral systems shall conform to the requirements of Rule 59.3–B in addition to the above requirements.

Note: Revised February 5, 2014 by Decision No. 1402015.

## Rule 49.4-Table 8 (Minimum Conductor Sizes)

| Table 8: Minimum Conductor Sizes (150–Foot Spans or Less) |                               |                                        |                   |                                     |                                            |                                                      |
|-----------------------------------------------------------|-------------------------------|----------------------------------------|-------------------|-------------------------------------|--------------------------------------------|------------------------------------------------------|
| Loading Conditions and Grade of Construction              | Material or Type of Conductor |                                        |                   |                                     |                                            |                                                      |
|                                                           | Soft or Annealed Copper       | Hard–Drawn or Medium Hard–Drawn Copper | Stranded Aluminum | Aluminum Conductor Steel Reinforced | Copper Covered Steel, Bronze or Composites | Galvanized Iron or Galvanized Steel                  |
|                                                           | AWG                           | AWG                                    | AWG               | AWG                                 | AWG                                        |                                                      |
| Heavy Loading                                             |                               |                                        |                   |                                     |                                            |                                                      |
| Grade "A"                                                 | 4                             | 6                                      | 1                 | 4                                   | 6                                          | <del>1/4 .25 inch Dia. meter In. Strand</del>        |
| Grade "B" (a) (h)                                         | 4                             | 6                                      | 1                 | 6                                   | 8                                          | <del>9-BWG .148 Dia. in.</del>                       |
| Grade "C" (h)                                             | 4                             | 6                                      | 1                 | 6                                   | 8                                          | <del>9-BWG .148 Dia. in.</del>                       |
| Light Loading                                             |                               |                                        |                   |                                     |                                            |                                                      |
| Grade "A"                                                 | 4                             | 6                                      | 1                 | 4                                   | 8                                          | <del>1/4 .25 Dia. In. Inch Diameter Strand (b)</del> |
| Grade "B" (a) (c) (h)                                     | 6                             | 6                                      | 1                 | 6                                   | 8                                          | <del>9-BWG .148 Dia. In.</del>                       |
| Grade "C" (c) (h)                                         | 6                             | 8                                      | 1                 | 6                                   | 10                                         | <del>9-BWG .148 Dia. In.</del>                       |
| Heavy and Light Loading                                   |                               |                                        |                   |                                     |                                            |                                                      |
| Supply Service Drops Crossing Trolley Wires               | 8                             | 10                                     | -                 | -                                   | 12                                         | -                                                    |
| Other Supply Service Drops                                | 10                            | 10                                     | -                 | -                                   | 12                                         | -                                                    |
| Grade <del>"F"</del> "C", Single Conductors (d)           | -                             | (e)                                    | -                 | -                                   | (e)                                        | <del>14-BWG .083 Dia. In.</del>                      |
| Grade <del>"F"</del> "C", Paired Conductors (d)           | -                             | 14(f)                                  |                   |                                     | 17 (g)                                     | -                                                    |

- (a) Communication conductors crossing over major railroads may be smaller but shall be not less than as specified in Rule 113.4.
- (b) Three–sixteenth–inch strand may be used upon special permission of this Commission.
- (c) May be smaller but shall provide tensile strength not less than #8 AWG soft copper, if less than 750 Volts, as per Rule 49.4–C2.

- (d) Communication service drops over supply lines shall conform to Rules 32.2–F and 32.2–G.
  - (e) #12 AWG or #14 NBS.
  - (f) Paired wire may be smaller per Rule 49.4–C7b.
  - (g) High strength paired wire may be smaller per Rules 49.4–C7b and 49.4–C8.
  - (h) May be reduced per Rule 49.4–C3.
-

## Rule 49.5

### 49.5 Insulators

#### A. Line

Insulators, supports, clamps and other miscellaneous attachments shall be designed to withstand ~~, with at least the safety factors specified in Rule 44,~~ the mechanical **stress load** to which they are subjected by conductors, wires or structures, under the loading conditions as specified in Rule 43 , with the load and strength factors of Rule 44 applied.

Pin insulators shall effectively engage the thread of the pin for at least two and one-half turns.

#### B. Guy

Guy insulators, including insulators in messengers, shall have mechanical strength at least equal to that required of the guys or messengers in which they are installed.

#### C. Replacements (See Rule 44.3)

#### D. Post

Post insulator units including insulator supports, clamps, and other miscellaneous attachments shall have a cantilever strength determined in accordance with paragraph 5.1.3 of the American Standard Insulator Tests, Publication No. C29.1–1961, or the latest revision thereof, equal to or greater than ~~the product of the safety factors specified in Rule 44 and~~ the mechanical load to which they are subjected by conductors, wires, or structures under the loading conditions as specified in Rule 43 with the load and strength factors of Rule 44 applied.

Note: Added January 6, 1968 by Decision No. 73455.

## Rule 49.6-B

### **B. Size**

The size and ultimate strength of guys crossing in spans over Class H, L, T or C circuits shall be not less than as specified in Table 9 and shall also ~~be such as to provide~~ meet the load and strength ~~safety~~ factor requirements ~~not less than those~~ specified in Rule 44 for the loads imposed by the construction involved under the loading conditions specified in Rule 43.

## Rule 49.7

### 49.7 Messengers and Span Wires

#### A. Material

Messengers and span wires shall be stranded and of galvanized steel, copper-covered steel or other corrosion-resisting material not subject to rapid deterioration.

#### B. Strength

Messengers and span wires with the load and strength factor requirements as specified in Rule 44 applied shall be capable of withstanding ~~with safety factors as specified in Rule 44,~~ the tension developed because of the load they support combined with the loading conditions specified in Rule 43. An allowance of 300 lbs. of vertical load for a worker and cable chair shall be made in computing tensions in messengers and span wires which support cables except in the case of short spans which are not required to support workers or where the ice loading specified in Rule 43.1-B would exceed the allowance for the worker and cable chair.

Guys supporting messenger loads shall comply with the load and strength safety factors requirements specified in Rule 44.

Note: Revised February 5, 2014 by Decision No. 14-02-015.

#### C. Supports

Messengers supporting cables shall be attached to poles or crossarms with hardware that complies with the safety load and strength factors requirements specified in Rule 44, based on the weight of the messenger wire, cable, line-mounted equipment plus an allowance of 300 lbs. for a worker and cable chair. If in heavy loading areas the specified ice load exceeds in weight the 300 lbs. allowance, such ice load shall be used in making the calculations in preference to the weight of the worker and cable chair.

Note: Revised February 5, 2014 by Decision No. 14-02-015.

#### D. Replacements (See Rule 44.3)

## Rule 54.5

### **54.5 Sags**

Minimum conductor sags shall be such that, under the loading conditions specified in Rule 43, the ~~safety factor~~ requirements specified in ~~Table 4~~, Rule 44 shall be met. See Charts in Appendix C for suggested sags at normal temperatures.

## Rule 56.2

### **56 Overhead Guys, Anchor Guys and Span Wires**

#### **56.2 Use**

Where the effects of the mechanical loads imposed on poles, towers, or structures are greater than can be supported with ~~safety factors as~~ the requirements specified in Rule 44, additional strength shall be provided by the use of guys or other suitable construction.

Where guys are used with poles or similar structures capable of considerable deflection before failure, the guys shall be able to support the entire load, the pole below the point of guy attachment acting merely as a strut.

Guys shall be attached to structures, as nearly as practicable, at the center of load. They shall be maintained taut and of such strength as to meet the ~~safety factors~~ requirements of Rule 44.

## Rule 57.2

### **57.2 Use of Messenger**

Where a cable is of such weight that it would not meet the ~~safety factors of Table 4~~ requirements of Rule 44 when self-supported, attachment to stranded messenger shall be made for supporting said weight.

## Rule 66.2

### 66 Guys

#### 66.2 Use

Where the effects of the mechanical loads imposed on towers or structures are greater than can be supported ~~with safety factors as per the requirements~~ specified in ~~r~~Rule 44 or the design of such towers and structures requires it, additional strength shall be provided by the use of guys or other suitable construction.

Where guys are used with structures capable of considerable deflection before failure, the guys shall be able to support the entire load, the structure below the point of guy attachment acting merely as a strut.

Guys shall be attached to structures, as nearly as practicable, at the center of load. They shall be maintained taut and of such strength as to meet ~~safety factors~~ the requirements of ~~r~~Rule 44.

## Rule 77.3

### **77.3 Material and Strength**

#### **B. Strength**

The strength of span wires, backbones, messengers, etc., shall be such that the ~~safety factors~~ requirements of Rule 44 are met.

Rule 81.3

**81.3 Material and Strength**

Communication poles shall meet the material and strength requirements specified in Section IV.

**A. Replacement of Wood Poles in Grade C Construction**

Wood poles in Grade C construction shall be replaced or reinforced ~~before the safety factor has been reduced to less than one in accordance with the requirements of Rule 44.3,~~ except that the circumference of sound solid wood within 18 inches above and below the ground line on such poles before replacement or reinforcement shall not be less than as follows:

|                                                                  |           |
|------------------------------------------------------------------|-----------|
| Poles supporting 10 or less open wire<br>Conductors              | 9 inches  |
| Poles supporting cable, or more than 10<br>open wires conductors | 12 inches |

Note: Revised November 21, 1990 by Resolution SU-6, January 13, 2005 by Decision No. 0501030, and February 5, 2014 by Decision No. 1402015.

## Rule 84.5

### **84.5 Sags**

The minimum conductor sags shall be such that under the specified loading conditions, the ~~safety factor~~ requirements specified in ~~Table 4,~~ Rule 44 shall be met.

## Rule 86.2

### 86.2 Use

Where ~~the effects of the~~ mechanical loads imposed on poles, towers or structures are greater than ~~can~~ be supported ~~with the safety factors as per the requirements~~ specified in Rule 44, additional strength shall be provided by the use of guys or other suitable construction.

Where guys are used with poles or similar structures capable of considerable deflection before failure, the guys shall be able to support the entire stress, the pole below the point of guy attachment acting merely as a strut.

Guys shall be attached to structures as nearly as practicable at the center of load. They shall be maintained taut and of such strength as to meet the ~~safety factors~~ requirements of Rule 44.

## Rule 87.2

### **87.2 Use of Messenger**

Where a cable is of such weight that it would not meet the ~~safety factors of Table 4~~ requirements of Rule 44 when self-supported, said weight shall be supported by attachment to a stranded messenger.

## Rule 87.5

### **87.5 Fastenings**

Messenger fastenings shall meet the ~~safety factors~~ requirements of Rule 44. The fastenings or attachments by which messengers are deadended shall have a strength at least equal to that of the strand to which they are attached.

## Rule 94.3

### 94.3 General Requirements

On joint use poles supporting Class T, C, L or H Circuits (up to 50 kV), the following shall apply:

A. Antennas shall meet the requirements of Class C equipment, unless otherwise specified in this rule.

B. All associated elements of the antenna (e.g. associated cables, messengers) shall meet the requirements of Class C circuits.

C. Support elements (e.g. arms, braces, brackets, hardware) and pole-top extensions shall conform to the requirements of Section IV.

Note: Support elements (e.g. arms, braces, brackets, hardware) and pole-top extensions installed above supply lines shall meet Grade "A" requirements ~~and safety factors~~ specified in Rule 44, ~~Table 4~~.

## Appendix B

### Appendix B Mechanical and Loading Data for Conductors

The tables included in Appendix B contain mechanical data for conductors commonly used in supply and communication lines. The ultimate strengths and other data for copper, steel and iron wires are those contained in specifications of [ASTM International \(formerly - the American Society for Testing Materials\)](#) ~~or~~ are ultimate strengths based upon such specifications. For other types and kinds of conductors the ultimate strengths and other data used have been taken from manufacturers' specifications.

The requirements of Rule 43 were used to calculate the loaded conductor conditions.

Table No.

|    |                                                                                       |
|----|---------------------------------------------------------------------------------------|
| 17 | Copper Wire-Bare-Solid-Characteristics and Loading                                    |
| 18 | Copper Wire-Bare-Stranded and Solid-Characteristics and Loading                       |
| 19 | Copper Wire-Stranded and Solid-Double Braid Weather-proof-Characteristics and Loading |
| 20 | Copper Wire-Stranded and Solid-Triple Braid Weather-proof-Characteristics and Loading |
| 21 | Galvanized Steel and Iron Wire-Bare-Solid - Characteristics and Loading               |
| 22 | Copper Covered Steel-Strand, Solid and Composite - Characteristics and Loading        |
| 23 | Aluminum Cable Steel Reinforced-Bare-Characteristics and Loading                      |
| 24 | Mechanical Characteristics of Galvanized Steel Strand                                 |

#### **Strikeout/underline Appendix B Table Footnotes**

##### **Tables 17-20**

- **ASTM B1-~~39-13(2018)~~** Standard Specification for Hard-Drawn Copper Wire

##### **Tables 17-10**

- **ASTM B2 - ~~39-13(2018)~~** Standard Specification for Medium-Hard-Drawn Copper Wire

##### **Table 21**

- **ASTM A111 – ~~33 99a(2014)~~** Standard Specification for Zinc-Coated (Galvanized) "Iron" Telephone and Telegraph Line Wire

##### **Table 24**

- **ASTM A123 -~~33~~ /**A123M-17**** Standard Specification for Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products

## Appendix C

### Appendix C (a), Conductor Sags

#### (a) Basis of Sag Curves for Supply Conductors

Data are presented in Appendix C in the form of curves in Charts numbers 1 to 9 inclusive, showing conductor sags which produce tensions that do not exceed either 35% of ultimate strength of the conductor at 60° F. and no wind, or 50% of ultimate strength ~~safety factor of 2~~ of the conductor under the maximum loading conditions specified for Light or Heavy Loadings in Rule 43. These sags are considered particularly applicable to the stringing of new wire (i.e., they should be considered initial sags for conductors which have not been prestressed) and are not recommended in the case of used or so-called prestressed wire.

#### (b) Communication Conductor Sags

The ~~safety factors~~ requirements of Rule 44 and the conductor sizes of Rule 49.4 are the minimum requirements applicable to communication conductors. Conductors will meet the minimum requirements of these rules for Grade "C" construction.

## **Appendix F Typical Problems**

---

The application of line construction requirements specified in this Order is exemplified in the following:

- Part 1. Crossing Problem—A Class H and a Class C circuit Crossing over a major railroad, major Class C circuits and a highway.
- Part 2. Dead-~~E~~end Problem—H and Class L circuits at a dead end.
- Part 3. Angle Pole Problem—Guying a pole supporting Class H and Class L circuits at angles in lines.

The problems are computed on the assumptions of light loading conditions, with Grade "A" construction used for the power circuits and Grade "F" construction used for the communication circuits except in the crossing spans where Grade "B" is required. The construction details specified in these Typical Problems are made to conform to current good practice.

This edition of GO 95 replaces the use of "safety factors" with "load factors" (Table 4-1) and "strength factors" (Table 4-2). The ratios of the load factors in Table 4-1 to the strength factors in Table 4-2 correspond to equivalent minimum safety factors as indicated in Rule 44. In some cases, there are slight differences due to rounding the results of the calculations. The equivalent minimum safety factors are provided in Table F-1 (Table 4) which matches the minimum safety factors in Table 4 from previous editions of GO 95. Table F-1 (Table 4), previously referred to as Table 4, is referenced in Appendix F for historical purposes, and so other General Orders which incorporate Table 4 may continue to reference Table 4.

## Part I

Table F-1 (Table 4) Minimum Safety Factors

| Line Element                                                        | Grades of Construction |                 |                 |
|---------------------------------------------------------------------|------------------------|-----------------|-----------------|
|                                                                     | Grade "A"              | Grade "B"       | Grade "C"       |
| Conductors, splices and conductor fastenings (other than tie wires) | <u>2</u>               | <u>2</u>        | <u>2</u>        |
| Pins                                                                | <u>2</u>               | <u>2</u>        | <u>2</u>        |
| Pole line hardware                                                  | <u>2</u>               | <u>2</u>        | <u>2</u>        |
| Line Insulators (mechanical)                                        | <u>3</u>               | <u>2</u>        | <u>2</u>        |
| Guy insulators (mechanical)                                         |                        |                 |                 |
| Interlocking                                                        | <u>2</u>               | <u>2</u>        | <u>2</u>        |
| Noninterlocking glass fiber                                         | <u>3</u>               | <u>2 (a)</u>    | <u>2 (b)</u>    |
| Guys                                                                | <u>2</u>               | <u>2</u>        | <u>2</u>        |
| Messengers and span wires                                           | <u>2</u>               | <u>2</u>        | <u>2</u>        |
| Foundations against uplift                                          | <u>1.5</u>             | <u>1.5</u>      | <u>1.5</u>      |
| Foundations against depression                                      | <u>3</u>               | <u>2</u>        | <u>2</u>        |
| Poles, Towers and Structures                                        |                        |                 |                 |
| Wood                                                                | <u>4</u>               | <u>3</u>        | <u>2</u>        |
| Metal (including elements of foundations)                           | <u>1.5 (c)</u>         | <u>1.25 (c)</u> | <u>1.25 (c)</u> |
| Reinforced concrete                                                 | <u>4</u>               | <u>3</u>        | <u>3</u>        |
| Prestressed or post-tensioned concrete                              | <u>1.8</u>             | <u>1.5</u>      | <u>1.5</u>      |
| Other engineered materials                                          | <u>1.5</u>             | <u>1.25</u>     | <u>1.25</u>     |
| Crossarms                                                           |                        |                 |                 |
| Wood                                                                | <u>2</u>               | <u>2</u>        | <u>2</u>        |
| Metal (c)                                                           | <u>1.5 (c)</u>         | <u>1.25 (c)</u> | <u>1.25 (c)</u> |
| Prestressed Concrete                                                | <u>1.8</u>             | <u>1.5</u>      | <u>1.5</u>      |
| Other engineered materials                                          | <u>1.5</u>             | <u>1.25</u>     | <u>1.25</u>     |

- (a) Insulators are to be replaced before safety factors have been reduced (due to deterioration or changes in construction, arrangement, or other conditions subsequent to installation) to less than 95 percent of the safety factor specified in Rule 44.1.
- (b) Insulators are to be replaced before safety factors have been reduced (due to deterioration or changes in construction, arrangement, or other conditions subsequent to installation) to less than 75 percent of the safety factor specified in Rule 44.1.
- (c) For aluminum members subject to tension caused by one or more estimated loads and where the critical load combination for the tension member would not endanger adjacent compression members, the safety factor on ultimate tension shall be 2 for Grade "A" and 1.67 for Grades "B" and "C" construction.

## Crossing Problem

A diagram including dimensions is shown ~~on page F-18~~ at the end of Part 1. The data chosen for the crossing follow:

### Data of Crossing

#### *Circuits*

Two 3-phase 60,000 Volt power circuits. One metallic private Class "C" telephone circuit.

#### *Configuration*

Power conductors of each circuit are in vertical planes on opposite ends of the crossarm. Private telephone circuit is in a horizontal plane.

#### *Conductors*

Power circuits are six No. 00 AWG, bare, stranded, hard-drawn copper. Private telephone circuit is two No. 8 AWG, bare, solid, hard-drawn copper, except in the crossing span where it is two No. 6 AWG, bare, solid, hard drawn copper.

#### *Insulators*

Porcelain, pin type, meeting the requirements of Rule 49.5-A.

### *Ties*

Annealed copper wire to comply with Rules 49.3–B and 49.3–C.

### *Pins*

Power circuits–wrought iron pipe (extra strong), 1–1/2" x 18–1/2", to comply with Rules 49.3–B and 49.3C. Assumed bonded in accordance with the requirements of Rule 53.4.

Communication circuit - 1–1/2" x 9" locust.

### *Crossarms*

Power circuits–Douglas fir (dense), 4–3/4" x 5–3/4" x 12', 1.9" pin holes, 11/16" hole for through bolt.

Communication circuit–Douglas fir (dense), 3–1/4" x 4–1/4" x 42", 1–1/2" pin holes, 11/16" hole for through bolt.

### *Crossarm Braces*

Meeting the requirements of Rule 49.2–C.

### *Poles*

Western red cedar, round, butt treated.

### *Span Length*

Crossing span, 200 feet.

Adjacent spans, 150 feet.

## **Construction Requirements**

### *1. Conductor Sags and Tensions*

The conductors are assumed to be strung so that at normal conditions of 60°F and no wind the tension will be 35% of the ultimate tension of the conductors. From Chart No. 1, Page C–6, it will be seen that under these conditions the No. 00 AWG conductor, for a 200 foot span, will have a sag of 1.0 foot (0.99 when calculated), and the No. 6 AWG conductor will have a sag of 0.90 foot (0.89 when calculated). These sags may be calculated by means of the following approximation formula:

$$\text{Sag} = \frac{wd^2}{8T}$$

Where  $w$  = conductor loading, pounds per lineal foot  
 $d$  = span length, feet  
 $T$  = assumed allowable conductor tensions at 60°F and no wind

For No. 00 AWG conductor

$$\text{Sag} = \frac{0.4109 \times 200^2}{8 \times 2074} = 0.99 \text{ Foot}$$

For No 6 AWG conductor

$$\text{Sag} = \frac{0.0795 \times 200^2}{8 \times 448} = 0.89 \text{ Foot}$$

Maximum conductor load to be met with a safety factor of not less than 2 load and strength factors applied as specified in Rule 44.1 will occur at the conditions of 25°F and an 8 pounds per square foot (psf) wind (Rule 43.2). Conductors which have been strung at the normal conditions stated above (60°F, no wind, and 35% ultimate tension) will have sags and tensions at the maximum loading conditions of 25°F and an 8 pound psf wind as indicated below. Maximum conductor sags will occur at the condition of maximum temperature, 130°F and also are shown in the following tabulation:

|                                                       | #00 AWG <u>(Power)</u> |                     | #6 AWG <u>(Comm)</u> |                     |
|-------------------------------------------------------|------------------------|---------------------|----------------------|---------------------|
|                                                       | Sag<br>(Feet)          | Tension<br>(Pounds) | Sag<br>(Feet)        | Tension<br>(Pounds) |
| Ultimate Conductor Tension (See Appendix B, Table 18) | -                      | 5,925               | -                    | 1,280               |
| 35% Ultimate at 60°F, No Wind                         | 0.99                   | 2,074               | 0.89                 | 448                 |
| 25°F, 8 <u>Lb psf</u> Wind                            | 0.95                   | 2,605               | 1.18                 | 570                 |
| 130°F, No Wind                                        | 1.78                   | 1,157               | 1.55                 | 256                 |

From the foregoing it will be seen that by stringing the conductors to 35% of ultimate tension at 60°F and no wind, the safety factor of the conductors at maximum loading (25°F, 8 lb wind) is somewhat greater than the minimum of 2 required by Rule 44.1. The tension in the supply conductors (2,605 lbs) at maximum loading (25°F, 8 psf wind), multiplied by the load factor of 1.5 (Table 4-1), for Grade A construction, must not exceed the strength of the conductors (5,925 lbs) multiplied by the strength factor of 0.75 (Table 4-2), or it is required that

$$2,605 \text{ lbs} \times 1.5 \leq 5,925 \text{ lbs} \times 0.75$$

or

$$2,605 \text{ lbs} \leq 5,925 \text{ lbs} / (1.5/0.75) = 5,925 \text{ lbs} / 2.0 = 2,962 \text{ lbs}$$

The tension in the communication conductors (570 lbs) at maximum loading (25°F, 8 psf wind), multiplied by the load factor of 1.25 (Table 4-1), for Grade B construction, must not exceed the strength of the conductors (1,280 lbs) multiplied by the strength factor of 0.625 (Table 4-2), or it is required that

$$570 \text{ lbs} \times 1.25 \leq 1,280 \text{ lbs} \times 0.625$$

or

$$570 \text{ lbs} \leq 1,280 \text{ lbs} / (1.25/0.625) = 1,280 \text{ lbs} / 2.0 = 640 \text{ lbs}$$

Hence, the tensions at maximum loading for both types of circuits are within the required limits.

Lesser sags than those shown above may be used, provided conductor tension, at maximum loading condition specified in Rule 43, does not exceed 50% of the ultimate tension of the conductor. The rules, of course, do not prevent the use of greater sags than are calculated above.

## 2. Conductor Clearance from Center Line of Pole

Minimum clearances specified in Table 1, Case 8 and Rule 54.4–D2 and the clearances assumed for the purposed of this problem are as follows:

|                        | Minimum | Used  |
|------------------------|---------|-------|
| 60,000 Volt circuits   | 21.5"   | 5' 6" |
| Communications circuit | 15"     | 18"   |

## 3. Conductor Separation

Table 2, Case 12, Column H modified by Rule 54.4–~~C1c~~C1c, permits a vertical separation of not less than 36 inches between the conductors of a 60,000 Volt circuit in vertical configuration. For this problem a separation of 5'6" is used.

The minimum separation between the level of the lowest supply conductor and the communication circuit is 72 inches (Table 2, Case 8, Column H). For the problem, a separation of 96 inches between crossarm centers is used.

## 4. Clearances of Conductors Above Crossarms

The minimum clearance of a 60,000–volt conductor from the surface of a crossarm is required (by Table 1, Case 9, Column F) to be at least 1/4 of the pin spacing specified in Table 2, Case 15, Column H, which would be a minimum clearance of 9 inches. For this problem, an 18–1/2 inch pin is used which, with its insulator, places the conductor 14 inches above the crossarm.

## 5. Conductor Clearances Above Highway, Pole Lines and Railroad Tracks

The poles supporting the crossing span are 55 feet in length, set 7 feet (Rule 49.1C) in the ground. From dimensions of the pole framing diagram the distance of the private telephone circuit above ground is 28' 4". For this problem, a common elevation has been assumed for the ground line, the railroad tracks and the highway.

The sag of the communication conductors in the crossing span is approximately 11 inches at 60°F and 19 inches at 130° F. Since the allowable variation of 5% for temperature, applied to the ground clearance of 27' 5" (28' 4" - 11"), is 1' 4", which is greater than the difference between the sags at 60°F (11") and at 130°F (19"), the clearances may be determined at 60°F for all conditions. In the [crossing diagram, Page F–18 at the end of Part 1](#), the distances from supporting pole C to the various objects crossed over by the conductors are as follows:

|                               |      |    |
|-------------------------------|------|----|
| Telephone pole line           | 37'  | 6" |
| Highway (center)              | 60'  | 0" |
| Telegraph pole line on RR r/w | 97'  | 6" |
| Railroad Tracks (center)      | 138' | 9" |

Railroad Signal pole line                      180' 0"

The total length of crossing span is 200 feet. Therefore, the clearance at 60°F of the private communications circuit above the telephone lead at point of crossing is obtained as follows:

Clearance point distance from Pole C is 37' 6".

At 37' 6", or 18.8% of the span, the sag is equivalent to 61% of the center sag (see Chart No. 9 on Page C-14), or  $0.61 \times 11 = 7''$  sag.

Therefore, the clearance equals:

$$28' 4'' - (7'' + 24') = 3' 9'' \text{ clearance.}$$

The minimum required clearance as given in Table 2, Case 3, Column C is 2 feet.

In a like manner the clearances, at 60°F, of the private communication circuit conductors at the other points of crossing are as follows:

| Points of crossing        | Clearances |     | Minimum<br>by Rule |     |
|---------------------------|------------|-----|--------------------|-----|
| Highway (center)          | 27'        | 7'' | 18'                | 0'' |
| Telegraph pole line       | 3'         | 5'' | 2'                 | 0'' |
| Railroad Tracks (center)  | 27'        | 7'' | 25'                | 0'' |
| Railroad Signal pole line | 6'         | 0'' | 2'                 | 0'' |


## 6. *Insulators*

In addition to the electrical requirements set forth in Rules 55 and 104, the insulators supporting the supply and communication conductors shall have safety factors (mechanical) of 3 and 2, respectively.

## 7. *Pins, Ties and Conductor Fastenings*

Ties used in connection with pin-type insulators shall conform to Rule 49.3. In this problem a No. 4 and No. 8 annealed copper wire are used for the No. 00 and No. 8 circuits involved.

Pins used in connection with pin-type insulators shall have sufficient strength to withstand the tension in the conductor. In the case under discussion wrought iron pipe-pins of the dimensions and construction indicated below are to be employed for the power conductors.

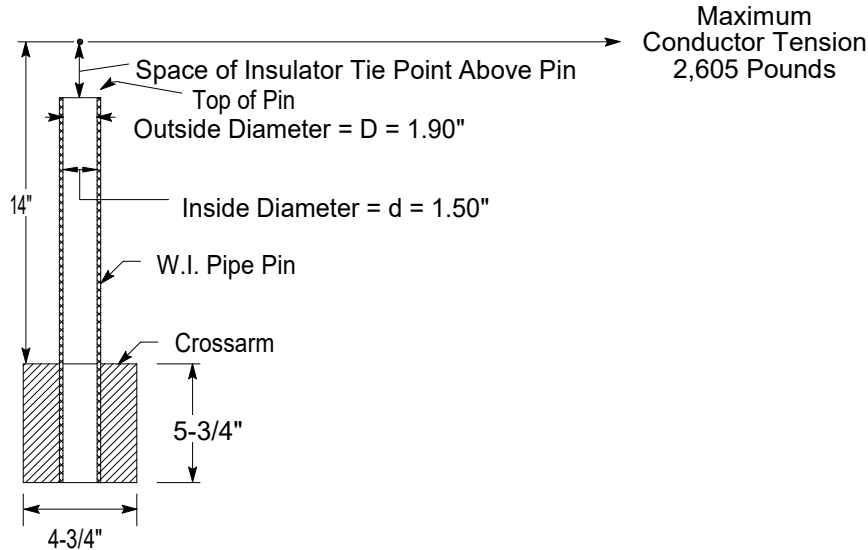

Bending moment (at crossarm)  $M = 2,605 \times 14 = 36,470$  pound-inches

$$\text{Section Modulus } E = \frac{11D^4 - d^4}{32D}$$

$$\text{Section Modulus } E = \frac{\pi(D^4 - d^4)}{32D} =$$

$$0.0982 \times \frac{1.90^4 - 1.50^4}{1.90} = .0412 \text{ inch}^3$$

$$\text{Fiber stress } S = \frac{M}{E} = \frac{36470}{0.412} = 88500 \text{ pounds per square inch}$$

Assuming that the ultimate fiber stress of wrought iron is 48,000 pounds per square inch, a single pin is not sufficient, as it provides a safety factor of 0.542,

$$\left( \frac{48000}{88500} = 0.542 \right)$$

$$0.0982 \times \frac{(1.90^4 - 1.50^4)}{1.90} = 0.412 \text{ in}^3$$

$$\text{Stress } S = \frac{M}{E} = \frac{36470}{0.412} = 88500 \text{ psi}$$

for an assumed tension of 2,605 pounds in the conductor at maximum loading.


Since a safety factor of unity (Rule 47.3) the stress in the pin (88,500 psi) at maximum loading must not exceed the strength of the pin (48,000 psi) is required by Rule 47.3, two pins are necessary and therefore double crossarms, pins and insulators are used on the poles supporting the crossing span.

Locust pins are to be used in this case for the private telephone conductors. Although a 1–1/2 inch locust pin would be sufficient to withstand the conductor tension of 570 pounds with a safety factor of at least unity, as required by Rule 47.2, care would be necessary to provide sufficient strength in the conductor fastenings. In this problem, the private telephone conductors are considered to be dead-ended at the ends of the crossing span.

## 8. Crossarms–Horizontal Loads

### Power Circuits

The point of maximum bending moment will be at the crossarm through bolt attaching the arm to the pole, at which point the cross section of the arm is reduced by the amount of the bolt hole. Crossarms supporting the 60 kV wires are to be Douglas fir, dense, dimensions 4–3/4" x 5–3/4" x 12', bored as illustrated below.

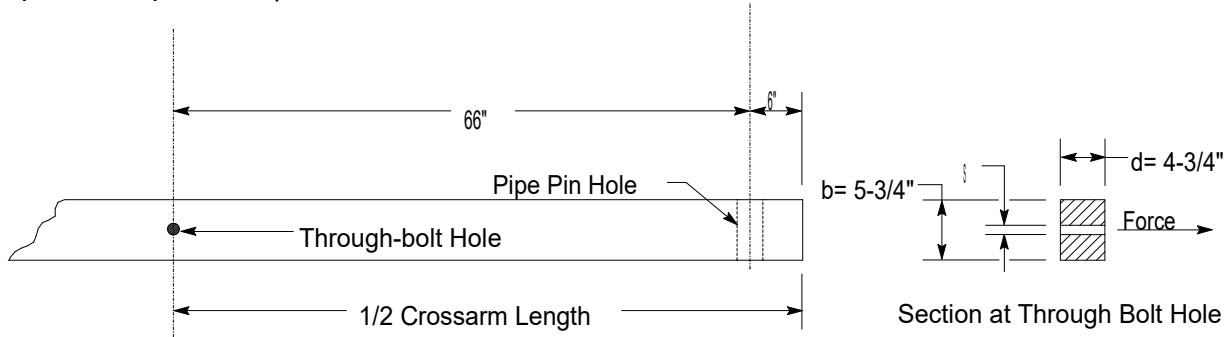

The section through the arm and the method of computing the fiber stress is shown below.

Note: for simplicity this example only assesses weak axis bending stress on the crossarm, there may be other load effects that should be assessed.

Long-time loading: Since longitudinal conductor loads are normally balanced, long-time horizontal loading of the power circuit crossarms need not be considered.

Single arm, Maximum loading, 25°F and an 8 ~~lb~~ psf wind

$$\text{Bending moment} = 2,605 \times 66 = 171,930 \text{ pound-inches}$$

$$\text{Section modulus} = \frac{bd^2}{6} \text{ where}$$

$$b = 5.75" - 0.69 = 5.06"$$

$$d = 4.75"$$

$$s = 11/16" = 0.69"$$

$$\text{Section modulus} = \frac{5.06 \times 4.75^2}{6} = 19.0 \text{ inches}^3$$

$$\text{Section modulus} = \frac{5.06 \times 4.75^2}{6} = 19.0 \text{ in}^3$$

Fiber Stress = Bending moment divided by

$$\text{Section modulus} = \frac{171930}{19.0} = 9050 \text{ lbs-per-square-inch}$$

$$\text{Section modulus} = \frac{171930}{19.0} = 9050 \text{ psi}$$

As the ~~allowable~~ value for ~~modulus of rupture designated fiber strength~~ in bending under maximum loading conditions is ~~6,300 lbs per sq. in. 7,800 psi~~ (see ~~Table 5, Rule 48.1 ANSI O5.3 2008~~), a single crossarm of the size chosen provides a ~~safety factor strength~~ of only ~~0.70 for 0.86 of~~ the assumed load ~~effects~~ at maximum loading conditions, whereas the provisions of Rule 47.3 ~~require a safety factor of unity do not allow a strength less than the effects of the load~~. Double arms will, therefore, be used in this problem to meet the strength requirements applicable to crossarms at end supports of crossings. Double crossarm construction of this type with separation maintained by space bolts is assumed to have a horizontal strength equivalent to 130% of the sum of the strengths of two single crossarms acting independently.

*Maximum loading, 25°F and an 8 lb psf wind*

Bending moment =  $2,605 \times 66 = 171,930$  pound-inches

Single arm section modulus (same as previously calculated) =  $19.0 \text{ inches}^3$

Double arm section modulus =  $19.0 \times 2 \times 1.3 = 49.4 \text{ inches}^3$

~~Fiber stress =  $\frac{171930}{49.4} = 3440$  lbs per square inch~~


~~As the allowable modulus of rupture for short time loading is 6,300 lbs per sq. in. then the double crossarms under these conditions will provide a safety factor of 1.91, which meets the unity safety factor required by Rule 47.3.~~

Fiber stress =  $\frac{171930}{49.4} = 3440$  psi

Hence the fiber stress in the double crossarm (3,440 psi) at maximum loading (25°F, 8 psf wind) does not exceed the designated fiber strength of the crossarm (7,800 psi), as required by Rule 47.3.

## Private Communication Circuit

At the crossing span, double crossarms are used on account of dead-end construction due to change of conductor size. Current practice provides for this method of construction although a single arm has sufficient strength as is found ~~form from~~ the following calculations of modulus of rupture under the two limiting conditions of loading:

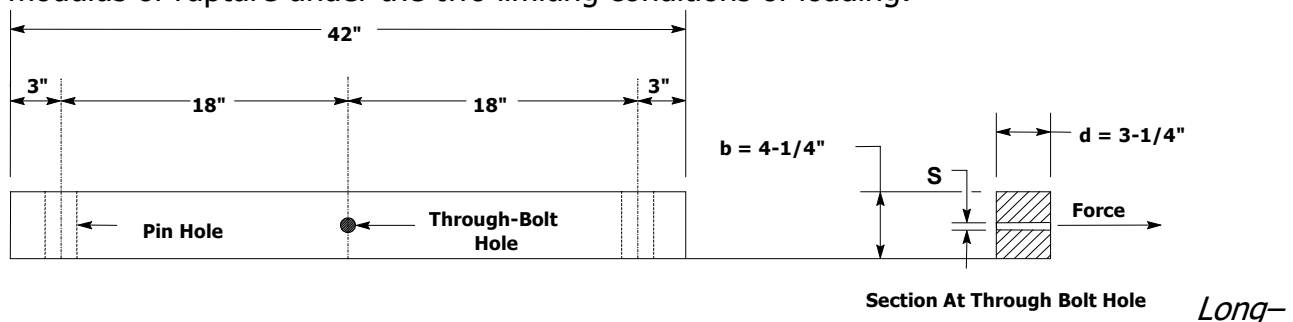

*time loading, 60°F and no wind*

Bending moment =  $448 \times 18 = 8,064$  pound-inches

$$\text{Section modulus} = \frac{bd^2}{6} = \frac{3.56 \times 3.25^2}{6} = 6.26 \text{ inches}^3$$

$$\text{Section modulus} = \frac{bd^2}{6} = \frac{3.56 \times 3.25^2}{6} = 6.26 \text{ in}^3$$

where  $d = 3.25''$

$s = 0.69''$

$b = 4.25'' - 0.69'' = 3.56''$

---


$$\text{Fiber stress} = \frac{8064}{6.26} = 1290 \text{ pounds per square inch}$$

The ~~allowable~~ value for ~~modulus-of-rupture designated fiber strength~~ for long-time loading in bending is  ~~$0.55 \times 6,300 = 4,465$  pounds per square inch~~ and therefore with a single arm the factor of safety under conditions of long-time loading is 2.69 (Rule 48.1: ANSI O5.3 2008) is  ~~$0.55 \times 7,800 = 4,290$  psi.~~

Hence, the fiber stress in the single crossarm (1,290 psi) at maximum loading (25°F, 8 psf wind) does not exceed the long-time strength of the crossarm (4,290 psi), as required by Rule 47.3.

### *Maximum Loading*

Bending moment =  $570 \times 18 = 10,260$  pound-inches

Section modulus =  $6.26 \text{ inches}^3$  (as per calculations above)

~~$$\text{Fiber stress} = \frac{10260}{6.26} = 1640 \text{ pounds per square inch}$$~~

$$\text{Fiber stress} = \frac{10260}{6.26} = 1640 \text{ psi}$$

The ~~allowable~~ value for ~~modulus-of-rupture designated fiber strength~~ in bending, under maximum loading conditions, is  ~~$6,300$  pounds per sq. in  $7,800$  psi (ANSI O5.3 2008).~~, therefore a single arm provides a safety factor of 3.84 under these maximum loading conditions.

Hence, the fiber stress in the single crossarm (1,640 psi) at maximum loading (25°F, 8 psf wind) does not exceed the designated fiber strength of the crossarm (7,800 psi), as required by Rule 47.3.

## 9. *Crossarms - Vertical Loads*

### Power Circuits

The vertical load on crossarms, where supports are approximately at the same elevation, is due to the vertical load of conductors in each adjacent span plus ~~200~~ 300 pounds at the outer pin position. In the problem under consideration, the conductor supports on the crossing poles (C and D) are at the same elevation, and the supports at the adjacent poles (B and E) are 4.5 feet lower in elevation, which difference in elevation is greater than the normal sag. Then the conductor loading on a crossing span support would be one-half the weight of the conductor of the crossing span plus one-half the conductor weight of a hypothetical span, the curve of which passes through the points of support.

Half the length of the hypothetical span may be calculated as follows:

$$X = \frac{D}{2} + \frac{hT}{Dw}$$

Where

X = 1/2 the hypothetical span in feet.

D = horizontal distance between supports in feet.

h = difference in elevation of supports in feet.

T = conductor tension in pounds.


w = weight of conductor in pounds per foot.

The total crossing support-load is calculated as follows:

$$\cancel{0.411 \times \frac{200}{2}} + \cancel{0.411 \left( \frac{150}{2} + \frac{4.5 \times 2074}{150 \times 0.411} \right)} + 200 = \cancel{334} \text{ pounds}$$

$$\underline{0.411 \times \frac{200}{2}} + \underline{0.411 \left( \frac{150}{2} + \frac{4.5 \times 2074}{150 \times 0.411} \right)} + 300 = \underline{434} \text{ pounds}$$

The bending moment is:  $\cancel{334 \times 66} = \cancel{22,040}$   $\underline{434 \times 66} = \underline{28,640}$  pound-inches

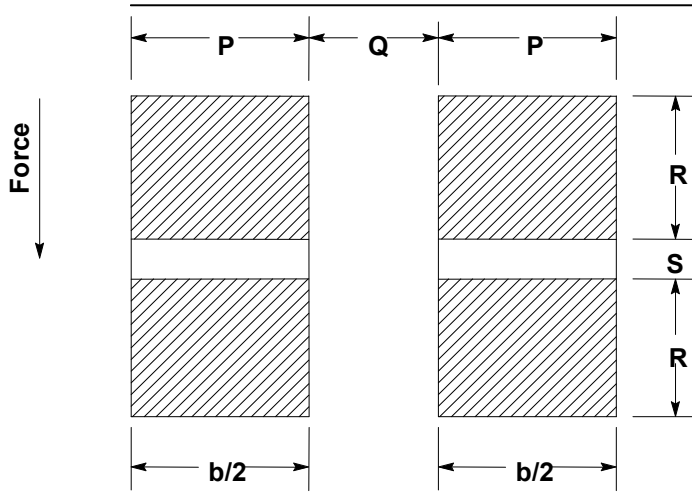

The method of calculating the unit fiber stress of the double crossarms acting as a simple beam is as follows:

$$\text{Section modulus} = \frac{b}{6} \times \frac{d^3 - d_1^3}{d} \text{ where}$$

$$b = P + P = 9.50''$$

$$d = R + S + R = 5.75''$$

$$d_1 = S = 0.69''$$

$$\text{Section modulus} = \frac{9.50}{6} \times \left( \frac{5.75^3 - 0.69^3}{5.75} \right) = \frac{9.50}{6} \times \frac{189.8}{5.75} = 52.3 \text{ inches}^3$$

$$\text{Fiber stress} = \frac{\text{Bending moment}}{\text{Section modulus}} = \frac{22040}{52.3} = 420 \text{ lbs per square inch}$$

$$\text{Section modulus} = \frac{9.50}{6} \times \left( \frac{5.75^3 - 0.69^3}{5.75} \right) = \frac{9.50}{6} \times \frac{189.8}{5.75} = 52.3 \text{ in}^3$$

$$\text{Fiber stress} = \frac{\text{Bending moment}}{\text{Section modulus}} = \frac{28640}{52.3} = 550 \text{ psi}$$

### Long-Time Loading

~~As the allowable modulus of rupture in bending is 0.55 x 6,300 lbs per sq. in. or 3,465 lbs per sq. in. (see Table 5), the double crossarms of the size chosen provide a safety factor of 8.2.~~

~~The designated fiber strength for long-time loading in bending (Rule 48.1: ANSI O5.3 2008) is 0.55 x 7,800 psi or 4,290 psi. The effects of the load (550 psi) multiplied by the load factor of 1.5 (Table 4-1), for Grade A construction, must not exceed the long-time strength of the crossarm (4,290 psi) multiplied by the strength factor of 0.75 (Table 4-2), or it is required that~~

$$550 \text{ psi} \times 1.5 \leq 4,290 \text{ psi} \times 0.75$$

or

$$550 \text{ psi} \leq 4,290 \text{ psi}/(1.5/0.75) = 4,290 \text{ psi}/2.0 = 2,145 \text{ psi}$$

Hence, the crossarms are more than adequate.

The fiber stress in the double crossarms of the private telephone circuit, similarly calculated, is found to be ~~196 lbs per sq. in. These arms obviously meet the strength requirements for vertical loads on crossarms less than the required strength.~~

Shear, compression and torsion stresses are not considered in this problem as they are negligible and likewise the effect of reduction of cross section due to bolt holes is not considered except for the through bolt holes.

## 10. Poles

The crossing poles are western red cedar and their dimensions are as follows:

|                              |             |
|------------------------------|-------------|
| Length                       | 55 feet     |
| Height above ground          | 48 feet     |
| Circumference at top         | 28 inches   |
| Diameter at top              | 8.9 inches  |
| Circumference at ground line | 49.0 inches |
| Diameter at ground line      | 15.6 inches |

Distance from ground line to conductors supported is given as follows:

|                              |        |
|------------------------------|--------|
| Top supply conductors        | 48' 9" |
| Middle supply conductors     | 43' 3" |
| Lower supply conductors      | 37' 9" |
| Private telephone conductors | 28' 4" |

Ground level at base of pole is considered to be at the same elevation as top of rail.

Dimensions of adjacent poles B and E are:

|                              |              |
|------------------------------|--------------|
| Length                       | 50 feet      |
| Height above ground          | 43.5 feet    |
| Circumference of top         | 28 .0 inches |
| Diameter of top              | 8.9 inches   |
| Circumference at ground line | 47.0 inches  |
| Diameter at ground line      | 15.0 inches  |

## 11. Transverse Load on Crossing Poles C and D

The moment at the ground due to an 8 ~~pound~~ psf wind pressure on conductors is:

$$M_c = L_n P_h \left( \frac{S_1 + S_2}{2} \right) \text{ pound-feet}$$

Where:

- L = Height of conductors above ground in feet  
 n = Number of wires  
 S<sub>1</sub> and S<sub>2</sub> = Length of crossing and adjacent spans, respectively  
 P<sub>h</sub> = Horizontal load per lineal foot due to an 8 ~~pound~~ psf wind pressure on projected area of wire  
 P<sub>h</sub> = 0.276 pounds per lineal foot for 00 AWG bare, stranded copper  
 = 0.108 pounds per lineal foot for 6 AWG bare, solid copper  
 = 0.085 pounds per lineal foot for 8 AWG bare, solid copper  
 M<sub>c0</sub> = Moment due to pressure on top supply conductors  
 M<sub>c1</sub> = Moment due to pressure on middle supply conductors  
 M<sub>c2</sub> = Moment due to pressure on lower supply conductors  
 M<sub>c3</sub> = Moment due to pressure on telephone conductors

$$M_{c0} = 48.75 \times 2 \times 0.276 \times \left( \frac{150 + 200}{2} \right) = 4710 \text{ lb-feet}$$

$$M_{c1} = 43.25 \times 2 \times 0.276 \times \left( \frac{150 + 200}{2} \right) = 4180 \text{ lb-feet}$$

$$M_{c2} = 37.75 \times 2 \times 0.276 \times \left( \frac{150 + 200}{2} \right) = 3650 \text{ lb-feet}$$

$$M_{c3} = 28.33 \times 2 \times 0.108 \times \left( \frac{200}{2} \right) = 610 \text{ lb-feet}$$

$$M_{c3} = 28.33 \times 2 \times 0.085 \times \left( \frac{150}{2} \right) = 360 \text{ lb-feet}$$

Total Moment due to Wind pressure on conductors = 13,510 lb-feet

The moment at the ground due to an 8 ~~pound~~ psf wind pressure on the pole is:

$$M_p = PH^2 \left( \frac{D_1 + 2D_2}{72} \right) \text{ pound-feet}$$

Where:

- M<sub>p</sub> = Moment due to wind pressure on pole  
 P = Pressure in lbs per sq. ft. on projected area of pole (8 ~~lbs/sq. ft~~ psf.)  
 H = Height of pole above ground in feet (48')  
 D<sub>1</sub> = Diameter of pole at ground in inches (15.6")  
 D<sub>2</sub> = Diameter of pole at top in inches (8.9")

$$M_p = \frac{8 \times 48^2 \times 15.6 + 2 \times 8.9}{72} = 8550 \text{ lb-ft.}$$

$$M_p = \frac{8 \times 48^2 \times (15.6 + 2 \times 8.9)}{72} = 8550 \text{ lb-ft.}$$

Total moment = 13,510 + 8,550 = 22,060 lb-ft.

$$\text{Moment of resistance of pole} = M = \frac{FI}{c}$$

Where:

F = Fiber stress in pounds ~~per sq. in. psi~~

I = Moment of inertia of section =  $\frac{\pi D_1^4}{64 \times 12}$

c = Distance from neutral axis to outer fiber =  $\frac{D_1}{2}$

$$M = \frac{\pi F D_1^3}{384} = \frac{F D_1^3}{122}$$

$$F = \frac{122M}{D_1^3} = \frac{122 \times 22060}{15.6^3} = 710 \text{ lbs per square inch}$$

$$F = \frac{122M}{D_1^3} = \frac{122 \times 22060}{15.6^3} = 710 \text{ psi}$$

~~The allowable fiber stress for western red cedar poles to provide a factor of safety of 4 is 1,500 pounds per sq. in., hence the crossing poles are not required to be side guyed since they have a factor of safety of 8.5 for transverse load.~~

The effects of the load (710 psi) multiplied by the load factor of 1.5 (Table 4-1), for Grade A construction, must not exceed the strength of the pole (6000 psi, Table 5) multiplied by the strength factor of 0.375 (Table 4-2), or it is required that

$$710 \text{ psi} \times 1.5 \leq 6,000 \text{ psi} \times 0.375$$

or

$$710 \text{ psi} \leq 6,000 \text{ psi} / (1.5/0.375) = 6,000 \text{ psi} / 4.0 = 1,500 \text{ psi}$$

Hence the crossing poles are not required to be side guyed.

## 12. Side Guying

If side guying were required for the crossing poles C and D the method of computing the same would be as follows:

Side guys are designed to take the entire transverse load of the pole, the pole acting merely as a strut.

The transverse force acting on the poles will be due to wind pressure on poles C and D and the transverse wind pressure on the conductors supported. The length of conductor used in computing this transverse force will be equal to one-half the distance between the guyed poles C and D, plus one-half the length of the span adjacent to these poles.

The total wind pressure is computed as follows:

On Conductors

$$3 \times 2 \times 0.276 \times \frac{150 + 200}{2} = 289.8 \text{ pounds}$$

$$2 \times 0.108 \times \frac{200}{2} = 21.6 \text{ pounds}$$

$$2 \times 0.085 \times \frac{150}{2} = 12.8 \text{ pounds}$$

On Pole

$$\frac{\cancel{D_1} + \cancel{D_2} \text{ HP}}{24} = \frac{15.6 + 8.91 \text{ 48} \times 8}{24} = 392.2 \text{ pounds}$$

Total Wind Pressure = 716.4 pounds


$$\frac{(\underline{D_1} + \underline{D_2}) \text{ H} \times \text{P}}{24} = \frac{(15.6 + 8.91) 48 \times 8}{24} = 392.2 \text{ pounds}$$

Total Wind Pressure = 716.4 pounds

The total moment on the poles is the same as developed for "Transverse load on poles" which was 22,060 pound-feet.

$$\frac{22060}{716.4} = 30.8 \text{ feet above ground}$$

A side guy could not be attached at this center of load and provide the required clearances from the communication line; therefore, for construction purposes the guy is assumed attached just below the lowest supply crossarm at a distance of 36 feet above ground.

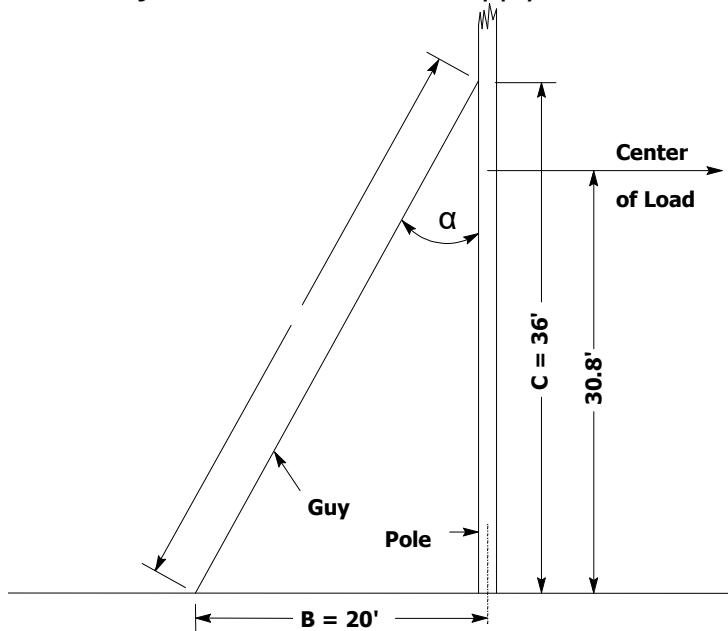

- Let  $M_t$  = Total moment on pole = 22,060 pound-feet  
 $C$  = Height of guy attachment above ground = 36 feet (assumed)  
 $B$  = Distance of guy anchor from base of pole = 20 feet  
 $T$  = Tension in guy wire in pounds  
 $A$  = Length of guy =  $\sqrt{(20^2 + 36^2)} = 41.2 \text{ feet}$

$$\sqrt{20^2 + 36^2} = 41.2 \text{ feet}$$

$$T = \frac{M_t}{C \sin \alpha}$$

$$\sin \alpha = \frac{B}{A} \text{ where}$$

$$1. A = \sqrt{B^2 + C^2}$$

$$\sin \alpha = \frac{20}{\sqrt{20^2 + 36^2}} = 0.485$$

$$T = \frac{22060}{36 \times 0.485} = 1260 \text{ pounds}$$

The specified safety factor for guys (Table 4, Rule 44.1) is 2 and, therefore, a guy having an ultimate strength of not less than 2,520 pounds is required. One 1/4 inch Siemens-Martin or a 5/16 inch common galvanized steel strand would meet the requirements for transverse load. The effects of the load (1,260 lbs) multiplied by the load factor of 1.5 (Table 4-1), for Grade A construction, must not exceed the strength of the guy multiplied by the strength factor of 0.75 (Table 4-2). For example, for a 5/16 common galvanized steel strand for which Table 24 indicates the strength is 3,200 lbs, it is required that

$$1,260 \text{ lbs} \times 1.5 \leq 3,200 \text{ lbs} \times 0.75$$

or

$$1,260 \text{ lbs} \leq 3,200 \text{ lbs} / (1.5/0.75) = 3,200 \text{ lbs} / 2.0 = 1,600 \text{ lbs}$$

Hence, one 5/16 inch common galvanized steel strand would meet the requirements for transverse load. One 1/4 inch Siemens-Martin (3,150 lbs, Table 24) would also meet the requirements.

### 13. Longitudinal Load on Crossing Poles C and D

Rule 47.3 provides that the strength of the crossing structures shall withstand at all times ~~with a safety factor of unity~~ the unbalanced stress due to the combined pull toward the crossing of one-third of the total number of conductors supported, the pull in each such conductor being taken as the tension due to the specified loading.

$$\text{Number of conductors involved} = \frac{8}{3} = 2\frac{2}{3}; \text{use } 3$$

$$\text{Number of conductors involved} = \frac{8}{3} = 2\frac{2}{3}; \text{use } 3$$

Location of conductors resulting in maximum load - two on top arm and one on next arm below

Bending moment:

$$2 \times 2,605 \times 48.75 = 254,000 \text{ pound-feet}$$


$$1 \times 2,605 \times 43.25 = 112,600 \text{ pound-feet}$$

$$\text{Total Moment} = 366,600 \text{ pound-feet}$$

$$\text{Fiber stress} = \frac{122M}{D_1^3} = 122 \times \frac{366600}{15.6^3} = 11780 \text{ lbs per square inch}$$

$$\text{Fiber stress} = \frac{122M}{D_1^3} = 122 \times \frac{366600}{15.6^3} = 11780 \text{ psi}$$

The allowable value of modulus of rupture fiber stress is greater than the designated fiber strength under this load is 6,000 ~~lbs per square inch~~ psi, hence poles C and D must be head guyed for longitudinal load.

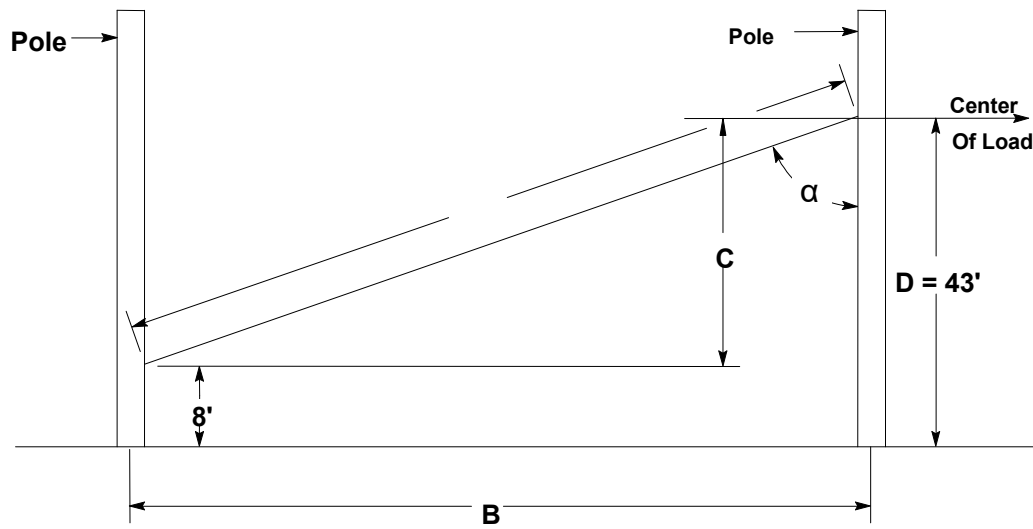

The head guy should be attached approximately at the normal center of load, therefore:

The bending moment under full longitudinal load would be:

$$\begin{aligned}
 48.75 \times 2 \times 2,605 &= 254,000 \text{ pound-feet} \\
 43.25 \times 2 \times 2,605 &= 225,300 \text{ pound-feet} \\
 37.75 \times 2 \times 2,605 &= 196,700 \text{ pound-feet} \\
 28.33 \times 2 \times 570 &= \underline{32,300} \text{ pound-feet} \\
 \text{Total moment} &= 708,300 \text{ pound-feet}
 \end{aligned}$$

The total longitudinal load would be:

$$\begin{aligned}
 3(2 \times 2,605) &= 15,630 \text{ pounds} \\
 2 \times 570 &= \underline{1,140} \text{ pounds} \\
 \text{Total wire tensions} &= 16,770 \text{ pounds}
 \end{aligned}$$

Therefore, the center of longitudinal load is:

$$\begin{aligned}
 D &= \frac{\text{Longitudinal Bending Moment}}{\text{Longitudinal Load}} \\
 &= \frac{708300}{16770} = 42.2 \text{ feet load center above ground}
 \end{aligned}$$

Use 43 feet (to avoid contact with arm)

B = 150 feet

C = 43 - 8 = 35 feet \*

$$A = \sqrt{B^2 + C^2} = \sqrt{(43)^2 + (150)^2} = 156.0$$

$$\sin \alpha = \frac{B}{A} = \frac{150}{156.0} = 0.962$$

\* Lower end of guy assumed 8 feet above ground on Poles A and E.

A guy attached at a point 43 feet above ground on pole C or D and at a point 8 feet above ground on pole B or E, respectively, would be required to withstand a load of:

$$\frac{366000}{43 \times 0.962} = 8860 \text{ pounds}$$

In this case, a 9/16 inch common, 7/16 inch Siemens–Martin, or 3/8 inch high–strength guy strand would meet the requirements of Rule [47.547.3](#). The horizontal load transmitted to pole B or E by such a head guy would be:

$$8,860 \times \sin \alpha = 8,860 \times 0.962 = 8,520 \text{ pounds}$$

The longitudinal moment on pole B and E would be:

$$8,520 \times 8 = 68,160 \text{ pound-feet}$$

and the fiber stress developed in pole B or E by the tension of ~~9,070~~ 8,520 pounds in the head guy would be:

Appendix F, Part 1


---

$$F = \frac{122M}{D_1^3} = \frac{122 \times 68160}{15.0^3} = 2460 \text{ pounds per square inch}$$

$$F = \frac{122M}{D_1^3} = \frac{122 \times 68160}{15.0^3} = 2460 \text{ psi}$$

Poles B and E would, therefore, be adequate to hold the contemplated guy tension ~~with a safety factor of unity~~ since the effects of the loads do not exceed the strength as required by Rule ~~47.5~~47.3.

# Crossing of Class H" Supply Line Over Major Railroad and Major Communication Lines

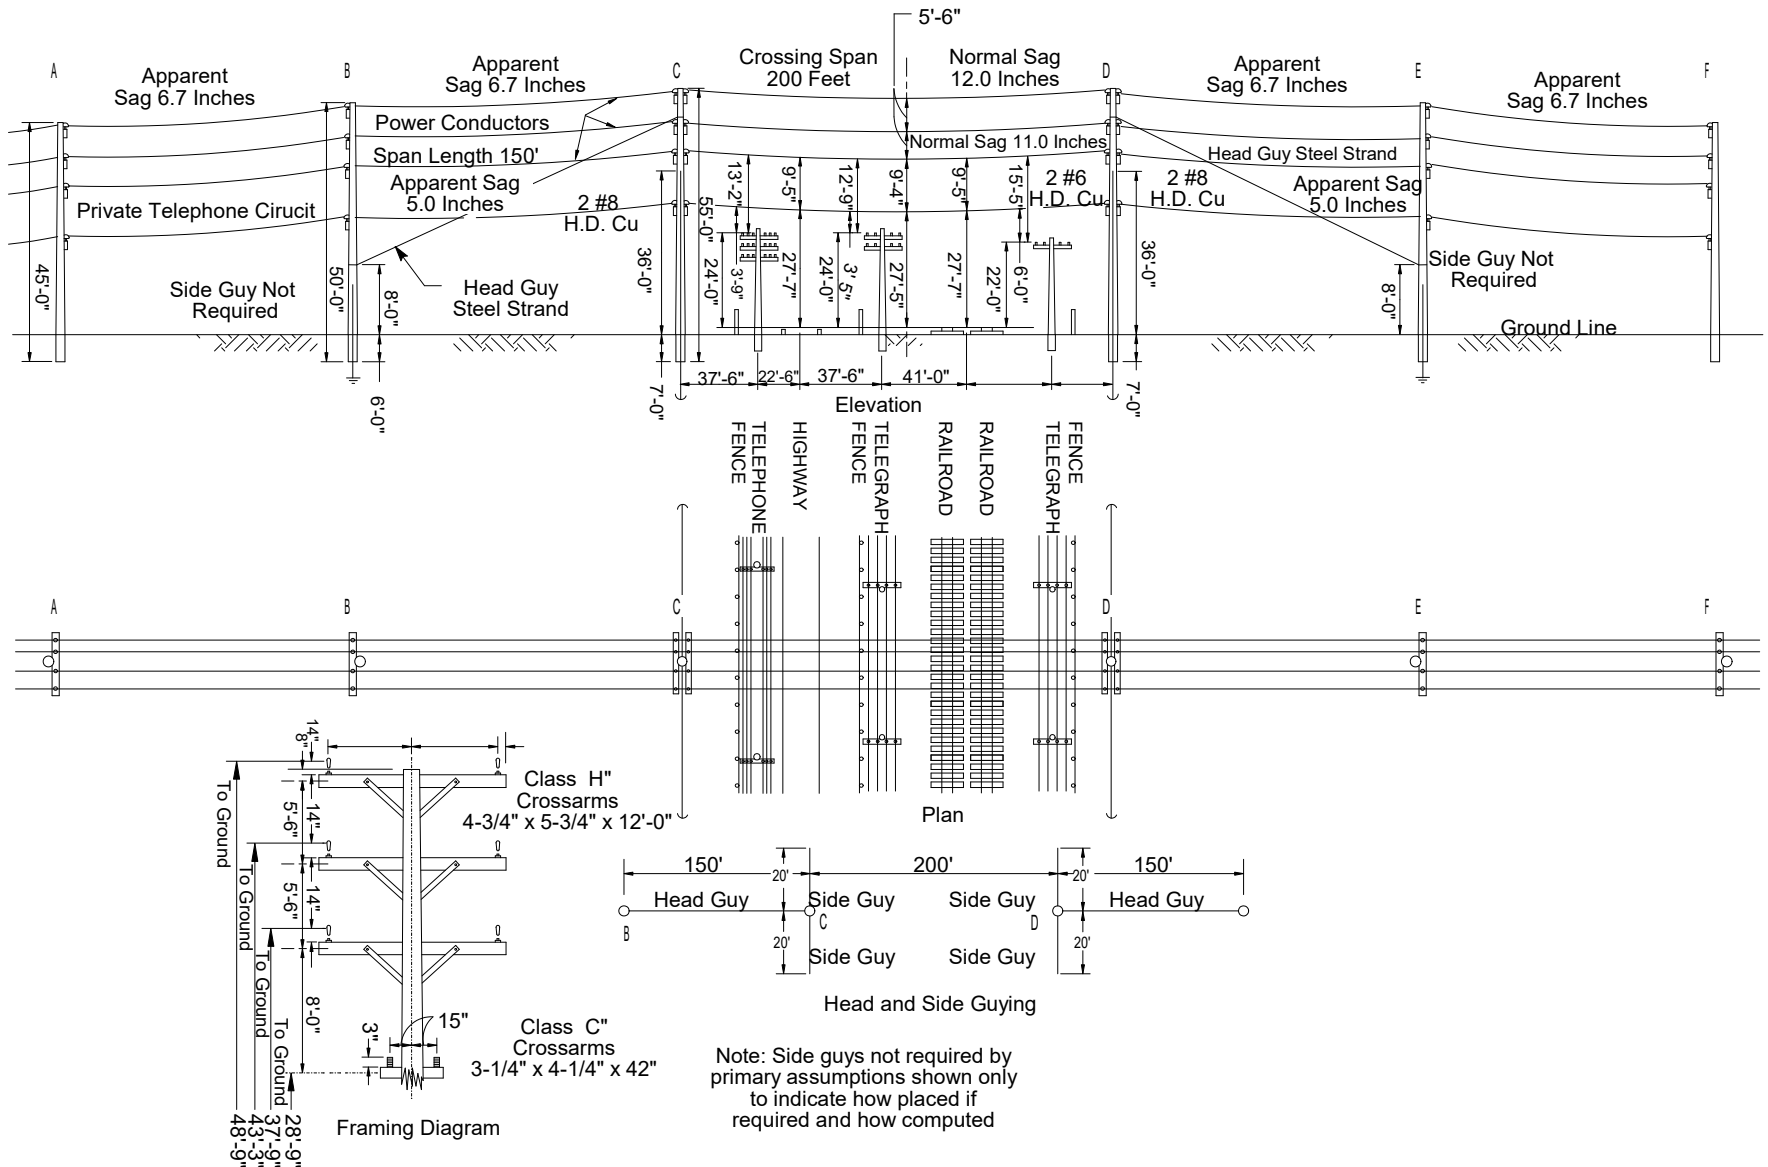

## Part 2

---

### Deadend Problem

It is the object of this problem to indicate the construction requirements for a typical deadend structure, since the longitudinal stresses imposed upon such a structure differ substantially from those on a pole on which the conductors supported are normally balanced. The deadend structure considered herein is assumed to support an 11,000 volt circuit, a 4,000 volt circuit and two secondary circuits. It is also assumed that the deadend pole takes Grade "A" construction by virtue of its location.

The deadend structure diagram and dimensions are shown ~~on Page F-23~~ at the end of Part 2. The primary data chosen for this structure are as follows:

### Data For Deadend Structure

#### Supply Conductors

11 kV circuit            3 #0 AWG Stranded, hard-drawn copper  
4 kV circuit            4 #2 AWG Stranded, hard-drawn copper  
120/240 volt circuit 3 #4 AWG Solid, hard-drawn copper  
120/240 volt circuit 3 #2 AWG Stranded, hard-drawn copper  
Insulators - Strain Type (to conform to Rule 49.5).  
Conductor fastenings (to meet the safety factor of Table 4, Rule 44.1)

#### Crossarms:

11 kV circuit            Douglas fir 4-3/4" x 5-3/4" x 8'-0"  
4 kV circuit            Douglas fir 4-3/4" x 4-3/4" x 7'-8"  
Secondary circuits    Douglas fir 4-3/4" x 4-3/4" x 7'-0"  
Crossarm braces (to conform to Rule 48.2 and 49.8)  
Pole - western red cedar.  
Pole dimensions: 55' in length; 25" top circumference; 50" ground line circumference (ground line diameter 15.9").

### Construction Requirements

#### 1. Conductor Tensions

It is assumed that the conductors are strung with the minimum sags specified in sag curves of Appendix C, hence the tension values at ~~60°F~~ 60°F and no wind (normal tensions) are 35% of the ultimate tensions shown in Table 18. These tensions for each of the conductor sizes and corresponding tensions at maximum loading (~~25°F~~ 25°F and wind of 8 ~~poundspsf~~) are as follows, where span length is 250 feet:

|                                    | Tension—Pounds  |                    |
|------------------------------------|-----------------|--------------------|
|                                    | 35% of Ultimate | At Maximum Loading |
| #0 AWG Stranded, hard-drawn copper | 1,664           | 2,125              |
| #2 AWG Stranded, hard-drawn copper | 1,065           | 1,360              |
| #4 AWG Solid, hard-drawn copper    | 690             | 890                |

## 2. Crossarms

Spacings assumed are shown on the pole framing diagram ~~on Page F-23 at the end of Part 2~~. Double crossarms of Douglas fir, dense, are employed for each of the four different circuits.

Computations of the fiber stresses imposed upon the various crossarms by the unbalanced wire loads of conductors in the physical configuration shown on the diagram are made in accordance with the method outlined in Part 1 to show these stresses under the conditions of long-time loading and maximum loading. Furthermore, double crossarm construction of this type with separation maintained by space bolts is assumed to have a horizontal strength equivalent to 130% of the sum of the strengths of two single crossarms acting independently. The stresses computed in this manner are:

|                             | Fiber Stress - <del>lbs per Sq. In. psi</del> |                 |
|-----------------------------|-----------------------------------------------|-----------------|
|                             | Long-Time Loading                             | Maximum Loading |
| Top crossarms               | 1,412                                         | 1,804           |
| Second <del>Crossarms</del> | 1,598                                         | 2,040           |
| Third crossarms             | 932                                           | 1,202           |
| Fourth crossarms            | 1,438                                         | 1,811           |

~~Since a factor of safety of 2 permits a maximum stress of modulus of rupture in bending of 1,732 lbs per square inch.~~

$$\left( \frac{6300 \times 0.55}{2} \right) = 1732 \text{ under the conditions of long-time loading (60°F and no Wind)}$$

~~and 3150 lbs per square inch  $\left( \frac{6300}{2} \right)$  at maximum loading see Table 5, the crossarms chosen are satisfactory.~~

~~The second crossarm is subject to the greatest loading, for which effects of the load (1,598 psi long-time and 2,040 psi maximum) multiplied by the load factor of 1.5 (Table 4-1), for Grade A construction, must not exceed the strength of the crossarm (Rule 48.1: ANSI O5.3~~

2008: 7,800 psi maximum or 0.55 x 7,800 psi = 4,290 psi long-time) multiplied by the strength factor of 0.75 (Table 4-2); or it is required that

Appendix F, Part 2

---

$$\underline{1,598 \text{ psi} \times 1.5 \leq 4,290 \text{ psi} \times 0.75}$$

or

$$\underline{1,598 \text{ psi} \leq 4,290 \text{ psi} / (1.5/0.75) = 4,290 \text{ psi} / 2.0 = 2,145 \text{ psi}}$$

and

$$\underline{2,040 \text{ psi} \times 1.5 \leq 7,800 \text{ psi} \times 0.75}$$

or

$$\underline{2,040 \text{ psi} \leq 7,800 \text{ psi} / (1.5/0.75) = 7,800 \text{ psi} / 2.0 = 3,900 \text{ psi}}$$

Hence, all the crossarms chosen are satisfactory.

3. Pole (See Page F-23 Diagram at End of Part 2)

~~Rule 44 provides that poles supporting unbalanced longitudinal loads in Grade "A" construction shall have a safety factor of 4 against such loads.~~ Rule 47 specifies that guys may be used to support unbalanced longitudinal loads ~~shall have a safety factor of 2 for all grades of construction with the load and strength factors provided in Rule 44.~~ (Where guys are used they must take the entire load with the designated safety load factors (Table 4-1) and strength factors (Table 4-2) applied and, the pole being considered merely as a strut).

Using the values given above for tensions at maximum loading, the following moments due to dead ending the conductors are obtained:

$$\begin{aligned} 3 \times 2,125 \times 47.3 &= 301,500 \text{ pound-feet} \\ 4 \times 1,360 \times 38.3 &= 208,400 \text{ pound-feet} \\ 3 \times 890 \times 30.3 &= 80,900 \text{ pound-feet} \\ 3 \times 1,360 \times 25.3 &= 103,200 \text{ pound-feet} \\ \text{Total Moments} &= 694,000 \text{ pound-feet} \end{aligned}$$

The total deadend stress-load, using the tension values for maximum loading given above, will be:

$$\begin{aligned} 3 \times 2,125 &= 6,380 \text{ pounds} \\ 4 \times 1,360 &= 5,440 \text{ pounds} \\ 3 \times 890 &= 2,670 \text{ pounds} \\ 3 \times 1,360 &= 4,080 \text{ pounds} \\ \text{Total} &= 18,570 \text{ pounds} \\ \text{Center of load} &= \frac{694000}{18570} = 37.4 \text{ feet above ground} \end{aligned}$$

The tension (T) of a single guy with a lead to height ratio of 1 to 1 (assumed), or a 45° angle, and a safety factor of 2 would be:

$$T = \frac{\text{safety factor} \times \text{total load}}{\cos \Theta} = \frac{2 \times 18570}{\cos \Theta} = 52500 \text{ pounds}$$

$$T = \text{total load} / \cos(45^\circ) = 18,570 \text{ lbs} / 0.707 = 26,265 \text{ lbs}$$

The effects of the load (26,265 lbs) multiplied by the load factor of 1.5 (Table 4-1), for Grade A construction, must not exceed the strength of the guy multiplied by the strength factor of 0.75 (Table 4-2), or it is required that

$$26,265 \text{ lbs} \times 1.5 \leq \text{strength} \times 0.75$$

or

$$\text{strength} \geq 26,265 \text{ lbs} \times 1.5 / 0.75 = 26,265 \text{ lbs} \times 2.0 = 52,530 \text{ lbs}$$

A stranded guy attached at the center of load could be used provided the allowable fiber stress of the pole is not exceeded. The stress due to guying at this point would be as follows:

The center of load (37.4' above ground) would be  
9.9 ft. (118.8") below the top conductors (11 kV) and  
0.9 ft. ( 10.8") below the second crossarm (4 kV)

The fiber stress in the pole at the center of load due to the tension in the conductors above the center of load is computed as follows:

$$\begin{array}{rcl} \text{Bending moment } 3 \times 2,125 \times 118.8 & = & 757,400 \text{ pound-inches} \\ & & 1,360 \times 10.8 & = & 8,800 \text{ pound-inches} \\ \text{Total moment} & = & 16,200 \text{ pound-inches} \end{array}$$

The section modulus of a solid circular section is  $E = \frac{\pi d^3}{32} = 0.0982d^3$

The diameter of the pole at the center of load is  $d = 9.7$  inches

Then,  $E = 0.0982 \times (9.7)^3 = 89.6 \text{ in}^3$

$$\begin{array}{l} \text{Fiber stress} = \frac{\text{Bending Moment}}{\text{Section modulus}} = \frac{816200}{89.6} = 9110 \text{ lbs per sq in} \\ \text{Fiber stress} = \frac{\text{Bending Moment}}{\text{Section modulus}} = \frac{816200}{89.6} = 9110 \text{ psi} \end{array}$$

~~Since a pole in Grade "A" construction must have a safety factor of 4, the allowable value of fiber stress would be  $5,600/4 = 1,400$  pounds per square inch; therefore, the pole cannot be guyed by a single guy but can be guyed as illustrated on Page F-23.~~

~~The effects of the load (9,110 psi) multiplied by the load factor of 1.5 (Table 4-1), for Grade A construction, must not exceed the strength of the pole (6,000 psi, Table 5) multiplied by the strength factor of 0.375 (Table 4-2), or it is required that~~


$$9,110 \text{ psi} \times 1.5 \leq 6,000 \text{ psi} \times 0.375$$

~~or~~

$$9,110 \text{ psi} \leq 6,000 \text{ psi} / (1.5/0.375) = 6,000 \text{ psi} / 4.0 = 1,500 \text{ psi}$$

~~which condition is not satisfied. Hence, the pole cannot be guyed by a single guy but can be guyed as illustrated in the diagram of the deadend structure.~~

# Deadend Structure

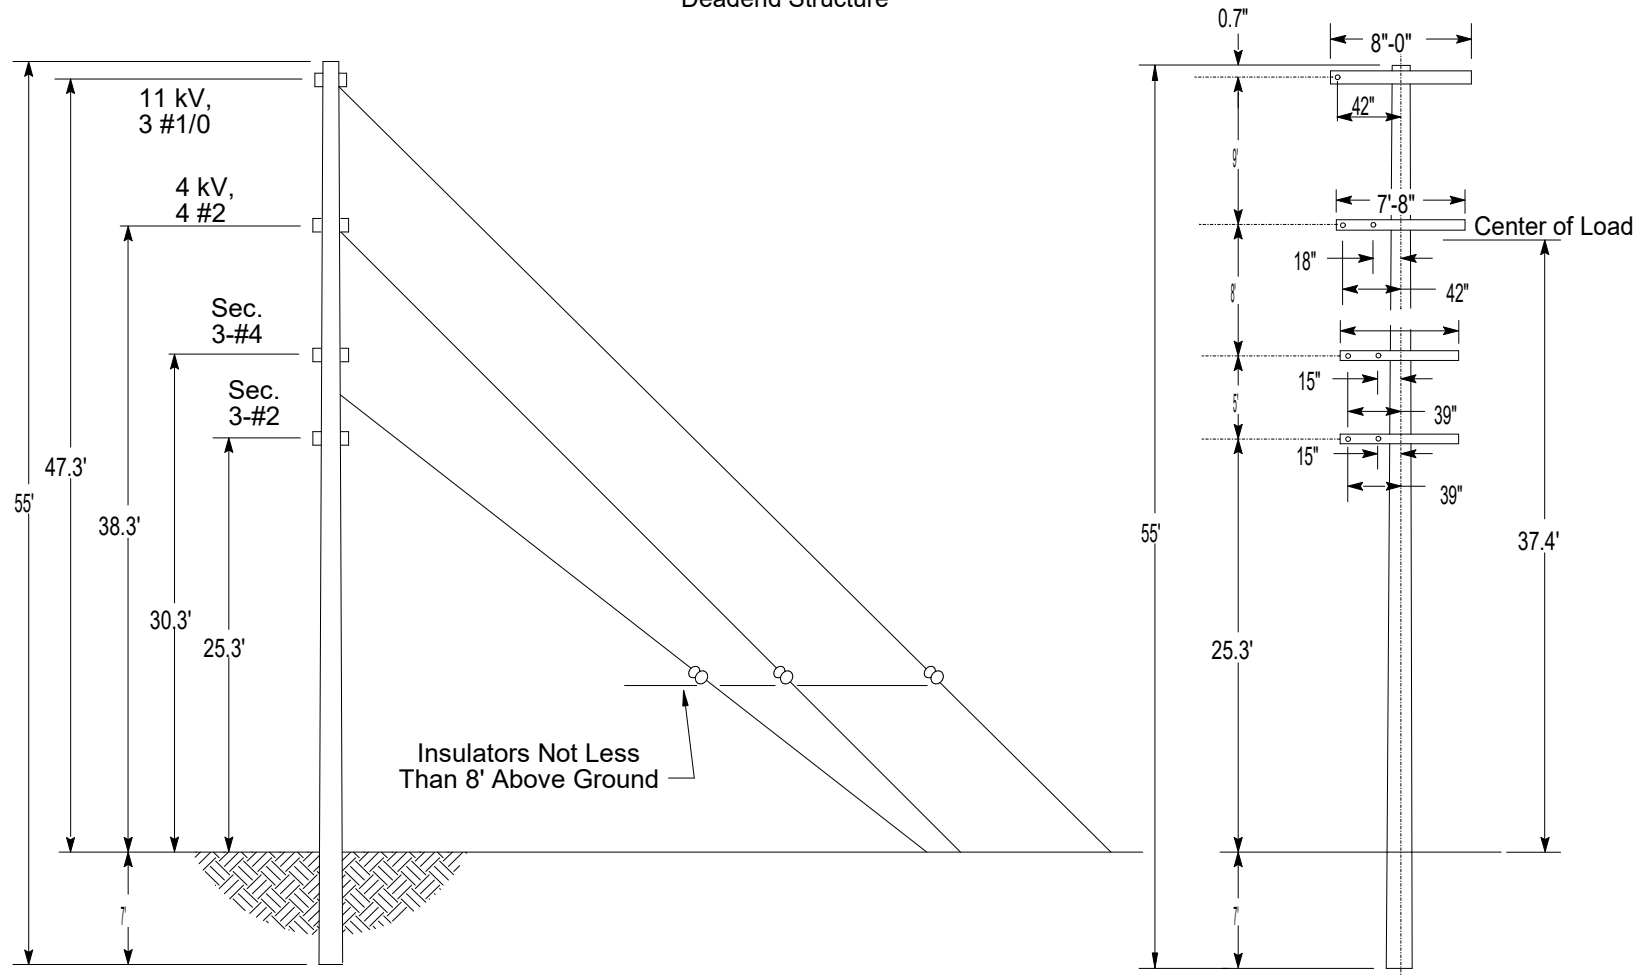

### Part 3


## Angle Pole Problem – Methods ~~E~~of Providing Proper Strength ~~F~~for Unbalanced Conductor Loads ~~A~~at Angle Poles

To maintain poles in proper position at angles and corners, it is generally necessary to use guys or some other form of pole bracing. Unless the line is dead-ended, the pull of the conductors is taken as being the same throughout the line.

The degree of unbalanced pull at an angle or corner pole is dependent upon the angle in the line at that point; that is, the greater the angle in the line, the greater is the magnitude of unbalance. Rule 4745 specifies that ~~when the longitudinal loads in a structure are not normally balanced, where there is a change in the direction of conductors and messengers, transverse load shall be calculated as the resultant of all tensions under the assumed loading conditions.~~ The members stressed shall be of such strength, ~~using guys if necessary,~~ as to withstand the total unbalanced load with ~~load and strength~~ factors of safety equal to those of Table 4 Rule 44.. ~~As it It is assumed that the line considered in this problem is Grade "A" construction., the pole would be required to provide a safety factor of 4 against unbalanced loads; where guys are used to take the unbalanced loads they must provide a safety factor of 2.~~

It is assumed that the line discussed in the foregoing deadend problem crosses from one side of a street to the opposite side, that the longitudinal distance along the street between the two poles concerned is 77 feet, and that the angle of deviation is 33° (see sketch). This would result in an unbalanced force being exerted in the direction of A of

$$18570 \times 2 \sin \frac{\beta}{2} = 18570 \times 2 \times 0.2840 = 10550 \text{ pounds}$$

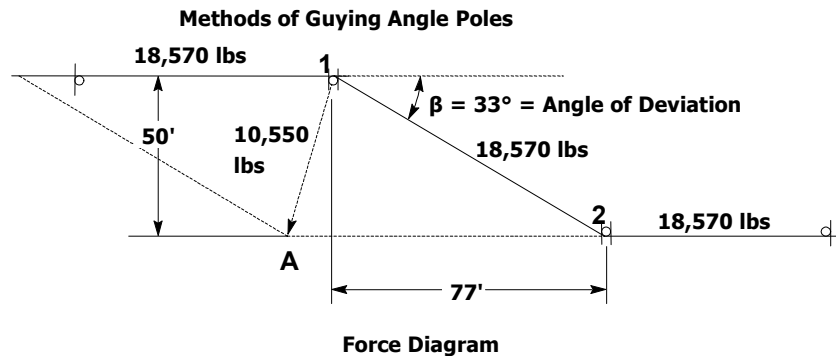

Assuming the pole height and framing as shown in Part 2, the top circumference of pole to be 25", the ground circumference to be 50" and the center of load to be 37.4 feet above ground line (as determined in Part 2), the fiber stress on the pole at the ground line is as follows:

Bending moment,  $M = 37.4 \times 10,550 = 394,400$  pound-feet

$$\text{Fiber stress} = \frac{122M}{d^3}$$

where circumference = 50" and  $d = 15.9$ "

$$\text{Fiber stress} = \frac{122 \times 394,400}{15.9^3} = 11,970 \text{ lbs-square-inch}$$

As a safety factor of 4 is required, the allowable working stress is  $\frac{5600}{4}$  or 1,400 lbs per square inch, and therefore the use of guys is necessary.

$$\text{Fiber stress} = \frac{122 \times 394,400}{15.9^3} = 11,970 \text{ psi}$$

The effects of the load (11,970 psi) multiplied by the load factor of 1.5 (Table 4-1), for the assumed Grade A construction, must not exceed the strength of the pole (6,000 psi, Table 5) multiplied by the strength factor of 0.375 (Table 4-2), or it is required that

$$11,970 \text{ psi} \times 1.5 \leq 6,000 \text{ psi} \times 0.375$$

or

$$11,970 \text{ psi} \leq 6,000 \text{ psi} / (1.5/0.375) = 6,000 \text{ psi} / 4.0 = 1,500 \text{ psi}$$

which condition is not satisfied. Hence, even without the additional horizontal load due to wind loading (Rule 43), it is clear the pole must be guyed to support the transverse loading.

A single guy attached at the center of load could be used provided the modulus of rupture with a safety factor of 4 is not exceeded effects of the load at the point of guying do not exceed the required strength of the pole. The stress due to guying at this point is as follows:

Bending moments

$$\text{Top arm} = 3 \times 2125 \times 118.8 \times 2 \sin \frac{\beta}{2} = 430,200 \text{ pound-inches}$$

$$\text{Second arm} = 4 \times 1370 \times 10.8 \times 2 \sin \frac{\beta}{2} = 33,400 \text{ pound-inches}$$

$$\text{Total moment} = 463,600 \text{ pound-inches}$$

Section modulus, E

The section modulus (E) at 37.4 feet above ground is 89.6 inches-cubed in<sup>3</sup>, which is the value computed in Problem 2 the example in Part 2.

Fiber stress:

The fiber stress is

$$F = \frac{M}{E} = \frac{463600}{89.6} = 5170 \text{ pounds per square inch}$$

~~Since this stress exceeds the allowable stress of 1,400 lbs per sq. in. for the pole,~~

$$F = \frac{M}{E} = \frac{463600}{89.6} = 5170 \text{ psi}$$

The effects of the load (11,970 psi) multiplied by the load factor of 1.5 (Table 4-1), for Grade A construction, must not exceed the strength of the pole (6,000 psi, Table 5) multiplied by the strength factor of 0.375 (Table 4-2), or it is required that

$$5,170 \text{ psi} \times 1.5 \leq 6,000 \text{ psi} \times 0.375$$

or

$$5,170 \text{ psi} \leq 6,000 \text{ psi} / (1.5/0.375) = 6,000 \text{ psi} / 4.0 = 1,500 \text{ psi}$$

which condition is not satisfied. Hence, it is necessary to place guys at more than one point on the pole, and therefore, they are attached at positions similar to the guys shown in the diagram ~~on Page F-23 at the end of Part 2.~~

(This Page Intentionally Left Blank)